


LINIER
SUSPENDED
W181S2

Ceiling suspended luminaire made from die-cast aluminium; optical system with 176 individual anti-glare chambers; surface Jet black; RAL 9005; DALI Push dim; light colour 3000 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90; degree of protection IP20; Class 2; inclusive cable suspension max. 3000mm; driver included; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear replaceable by end-user;

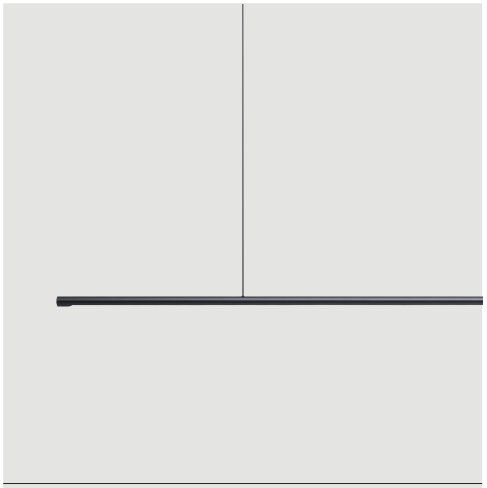

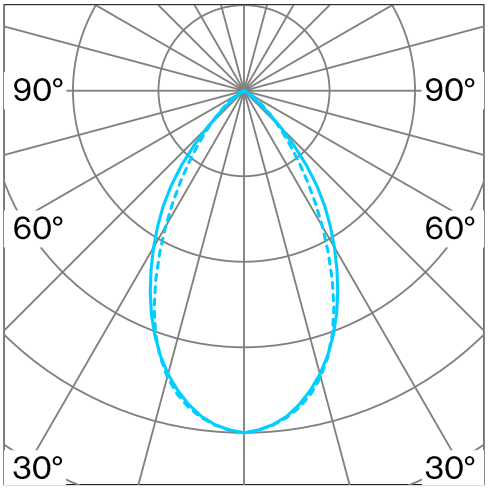

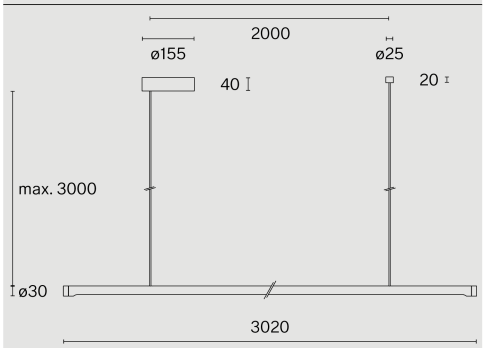

TECHNICAL INFORMATION

Physical	
Material	Lamp Body: Aluminium
IP Rating	IP20
Safety Class	Class II
LED	
Colour Rendering Index	CRI ≥ 90
Lumen Maintenance	L80 / 50000h
Macadam Ellipse	≤ 3 SDCM (initial MacAdam)

More technical information online

wastberg.com/en/products/linier-suspended-w181s2

ARTICLE-SPECIFIC INFORMATION

Mounting	Ceiling
Luminous Flux	3980 lm
Colour Temperature	3000 K
Control	DALI Push dim
Voltage	220 - 240 V
Power	42 W
Weight	2.7 kg

Colour / Finish	**Art. No. / EAN code**
Jet black ●	**181S205302** / 7330492016474

LINIER
SUSPENDED
W181S2

Wastberg AB
T +46 10 16 15 010
info@wastberg.com
wastberg.com

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.