


Wall surface luminaire; aluminium body and polycarbonate canopy; surface Pale red; NCS S 1010-Y90R; PMMA lens and polycarbonate reflector; with COB (Chip on Board) technology for maximum efficiency; DALI Push dim; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; degree of protection IP20; Class 1; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear not replaceable;

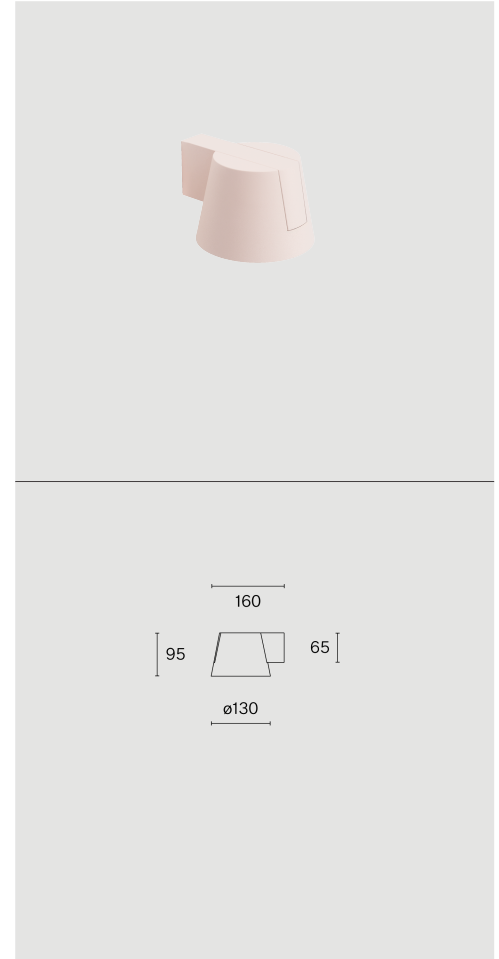

TECHNICAL INFORMATION

Physical	
Material	Lamp Body: Aluminium
IP Rating	IP20
Safety Class	Class I
LED	
Colour Rendering Index	CRI ≥ 90
Lumen Maintenance	L80 / 50000h
Macadam Ellipse	≤ 3 SDCM (initial MacAdam)

ARTICLE-SPECIFIC INFORMATION

Mounting	
Luminous Flux	
Colour Temperature	
Optic	
Control	
Voltage	
Power	
Weight	
Colour / Finish	
Pale red	

FOCAL WALL W222W

Wall	
Lumen	995 lm
Colour Temperature	2700 K
Optic	super wide flood
Control	DALI Push dim
Voltage	220 - 240 V
Power	10.5 W
Weight	0.5 kg
Art. No. / EAN code	
222W103272 / 7330492000480	

More technical information online

wastberg.com/en/products/focal-wall-w222w

