
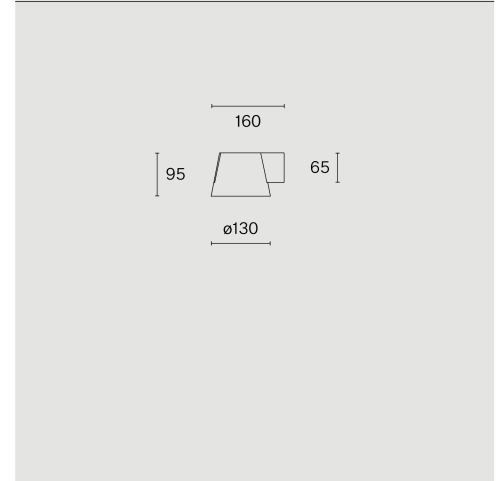


Wall surface luminaire; aluminium body and polycarbonate canopy; surface Traffic white; RAL 9016; PMMA lens and polycarbonate reflector; with COB (Chip on Board) technology for maximum efficiency; DALI Push dim; light colour 2700 K;  $\leq 3$  SDCM (initial MacAdam); CRI  $\geq 90$ ; degree of protection IP20; Class 1; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear not replaceable;

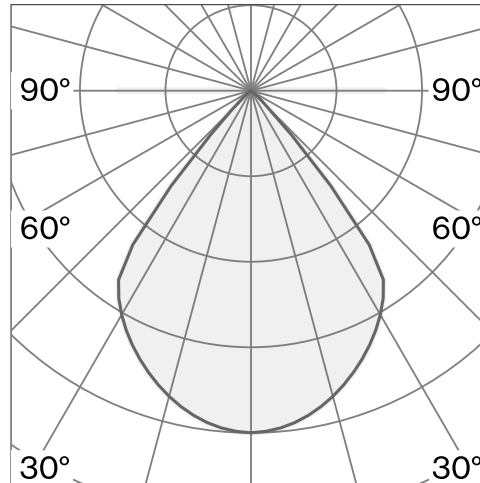

## TECHNICAL INFORMATION

<b>Physical</b>	
<b>Material</b>	Lamp Body: Aluminium
<b>IP Rating</b>	IP20
<b>Safety Class</b>	Class I
<b>LED</b>	
<b>Colour Rendering Index</b>	CRI $\geq 90$
<b>Lumen Maintenance</b>	L80 / 50000h
<b>Macadam Ellipse</b>	$\leq 3$ SDCM (initial MacAdam)

## ARTICLE-SPECIFIC INFORMATION

<b>Mounting</b>	
<b>Luminous Flux</b>	
<b>Colour Temperature</b>	
<b>Optic</b>	
<b>Control</b>	
<b>Voltage</b>	
<b>Power</b>	
<b>Weight</b>	
<b>Colour / Finish</b>	
Traffic white	

## FOCAL WALL W222W

<b>Wall</b>	
<b>Lumen</b>	995 lm
<b>Colour Temperature</b>	2700 K
<b>Optic</b>	super wide flood
<b>Control</b>	DALI Push dim
<b>Voltage</b>	220 - 240 V
<b>Power</b>	10.5 W
<b>Weight</b>	0.5 kg
<b>Art. No. / EAN code</b>	
222W102272 / 7330492000466	

More technical information online

[wastberg.com/en/products/focal-wall-w222w](http://wastberg.com/en/products/focal-wall-w222w)

