


Ceiling suspended luminaire; aluminium body and polycarbonate canopy; surface Pale blue; PMMA lens and polycarbonate reflector; NCS S 1010-R90B; with COB (Chip on Board) technology for maximum efficiency; DALI Push dim; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; degree of protection IP20; Class 1; inclusive cable suspension max. 3000 mm; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear not replaceable;

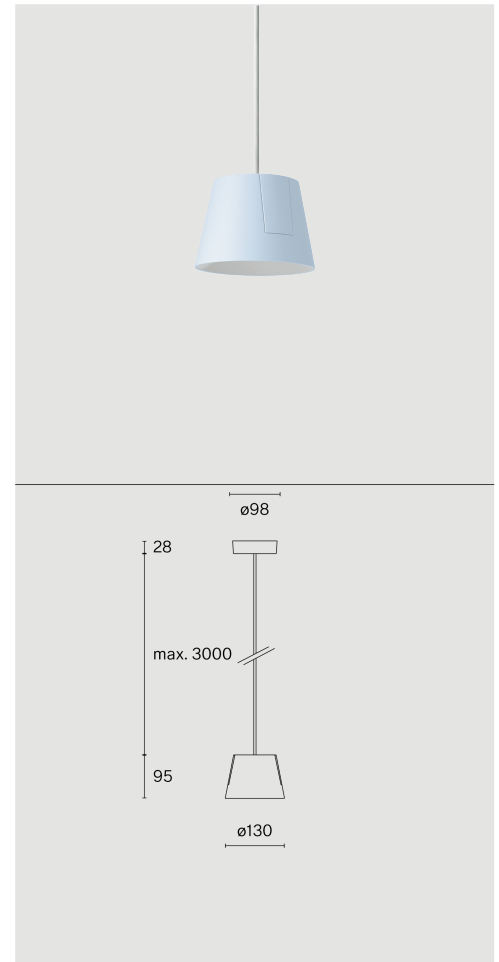

TECHNICAL INFORMATION

Physical	
Material	Lamp Body: Aluminium
IP Rating	IP20
Safety Class	Class I

LED	
Colour Rendering Index	CRI ≥ 90
Lumen Maintenance	L80 / 50000h
Macadam Ellipse	≤ 3 SDCM (initial MacAdam)

More technical information online
wastberg.com/en/products/focal-suspended-w222s



ARTICLE-SPECIFIC INFORMATION

Mounting	Ceiling
Luminous Flux	995 lm
Colour Temperature	2700 K
Optic	super wide flood
Control	DALI Push dim
Voltage	220 - 240 V
Power	10.5 W
Weight	0.7 kg

Colour / Finish	Pale blue ●
------------------------	-------------

FOCAL SUSPENDED W222S

Ceiling	Ceiling
Luminous Flux	995 lm
Colour Temperature	2700 K
Optic	super wide flood
Control	DALI Push dim
Voltage	220 - 240 V
Power	10.5 W
Weight	0.7 kg

Art. No. / EAN code	222S106272 / 7330492000459
----------------------------	----------------------------