


Ceiling suspended luminaire; aluminium body and polycarbonate canopy; surface Pale red; PMMA lens and polycarbonate reflector; NCS S 1010-Y90R; with COB (Chip on Board) technology for maximum efficiency; DALI Push dim; light colour 2700 K;  $\leq 3$  SDCM (initial MacAdam); CRI  $\geq 90$ ; degree of protection IP20; Class 1; inclusive cable suspension max. 3000 mm; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear not replaceable;

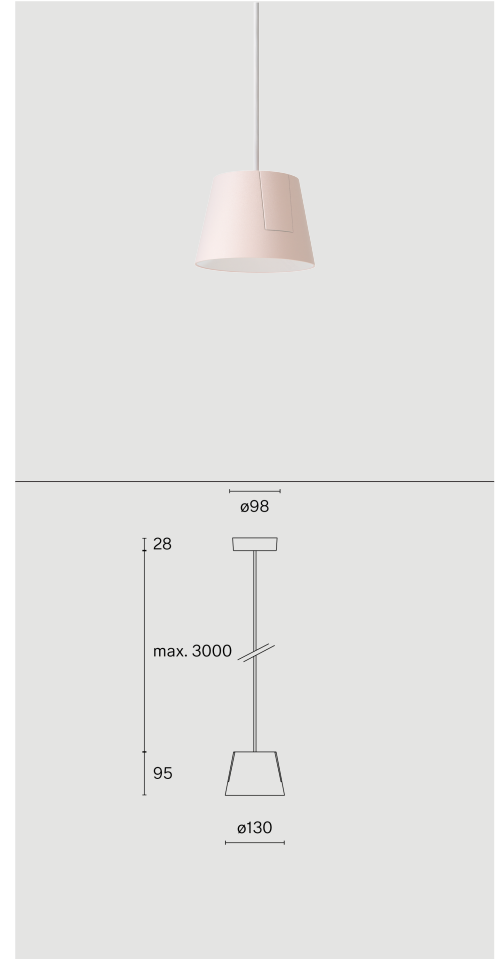

## TECHNICAL INFORMATION

|                               |                                 |
|-------------------------------|---------------------------------|
| <b>Physical</b>               |                                 |
| <b>Material</b>               | Lamp Body: Aluminium            |
| <b>IP Rating</b>              | IP20                            |
| <b>Safety Class</b>           | Class I                         |
| <b>LED</b>                    |                                 |
| <b>Colour Rendering Index</b> | CRI $\geq 90$                   |
| <b>Lumen Maintenance</b>      | L80 / 50000h                    |
| <b>Macadam Ellipse</b>        | $\leq 3$ SDCM (initial MacAdam) |

More technical information online  
[wastberg.com/en/products/focal-suspended-w222s](http://wastberg.com/en/products/focal-suspended-w222s)



## ARTICLE-SPECIFIC INFORMATION

|                           |            |
|---------------------------|------------|
| <b>Mounting</b>           |            |
| <b>Luminous Flux</b>      |            |
| <b>Colour Temperature</b> |            |
| <b>Optic</b>              |            |
| <b>Control</b>            |            |
| <b>Voltage</b>            |            |
| <b>Power</b>              |            |
| <b>Weight</b>             |            |
| <b>Colour / Finish</b>    | Pale red ● |

## FOCAL SUSPENDED W222S

|                            |                                   |
|----------------------------|-----------------------------------|
| <b>Ceiling</b>             |                                   |
| <b>995 lm</b>              |                                   |
| <b>2700 K</b>              |                                   |
| <b>super wide flood</b>    |                                   |
| <b>DALI Push dim</b>       |                                   |
| <b>220 - 240 V</b>         |                                   |
| <b>10.5 W</b>              |                                   |
| <b>0.7 kg</b>              |                                   |
| <b>Art. No. / EAN code</b> | <b>222S103272 / 7330492000435</b> |