


Ceiling suspended luminaire; aluminium body and polycarbonate canopy; surface Pale green; PMMA lens and polycarbonate reflector; NCS S 2005-B50G; with COB (Chip on Board) technology for maximum efficiency; DALI Push dim; light colour 2700 K;  $\leq 3$  SDCM (initial MacAdam); CRI  $\geq 90$ ; degree of protection IP20; Class 1; inclusive cable suspension max. 3000 mm; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear not replaceable;

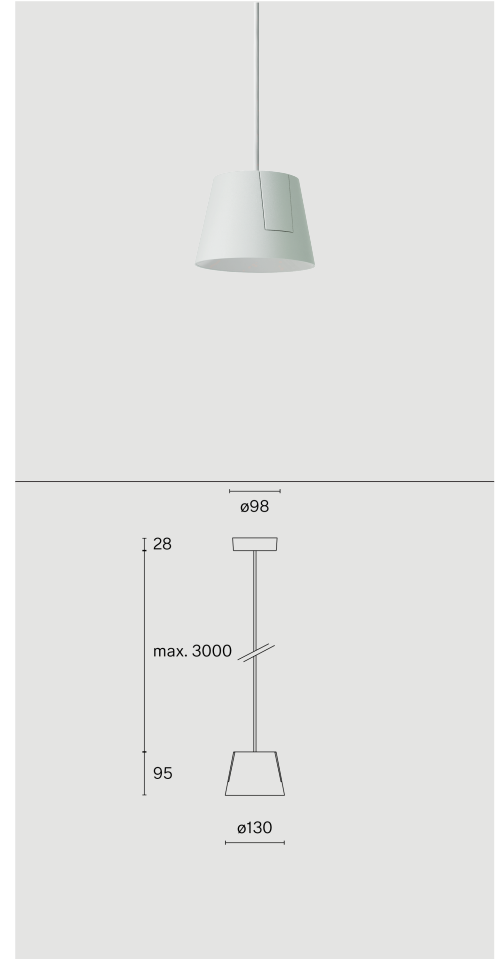

## TECHNICAL INFORMATION

<b>Physical</b>	
<b>Material</b>	Lamp Body: Aluminium
<b>IP Rating</b>	IP20
<b>Safety Class</b>	Class I

<b>LED</b>	
<b>Colour Rendering Index</b>	CRI $\geq 90$
<b>Lumen Maintenance</b>	L80 / 50000h
<b>Macadam Ellipse</b>	$\leq 3$ SDCM (initial MacAdam)

More technical information online  
[wastberg.com/en/products/focal-suspended-w222s](http://wastberg.com/en/products/focal-suspended-w222s)



## ARTICLE-SPECIFIC INFORMATION

<b>Mounting</b>
<b>Luminous Flux</b>
<b>Colour Temperature</b>
<b>Optic</b>
<b>Control</b>
<b>Voltage</b>
<b>Power</b>
<b>Weight</b>

<b>Colour / Finish</b>	Pale green ●
------------------------	--------------

## FOCAL SUSPENDED W222S

<b>Ceiling</b>
995 lm
2700 K
super wide flood
DALI Push dim
220 - 240 V
10.5 W
0.7 kg

<b>Art. No. / EAN code</b>	222S101272 / 7330492000442
----------------------------	----------------------------