

PASTILLE
BRACKET SHORT
W242BR1

Wall mounted luminaire made from biopolyamide; ABS reflector and polycarbonate diffuser; surface Jet black; RAL 9005; with COB (Chip on Board) technology for maximum efficiency; integrated dimmer switch; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 98; degree of protection IP20; Class 2; incl. 2000mm black cable plug; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear replaceable by end-user;

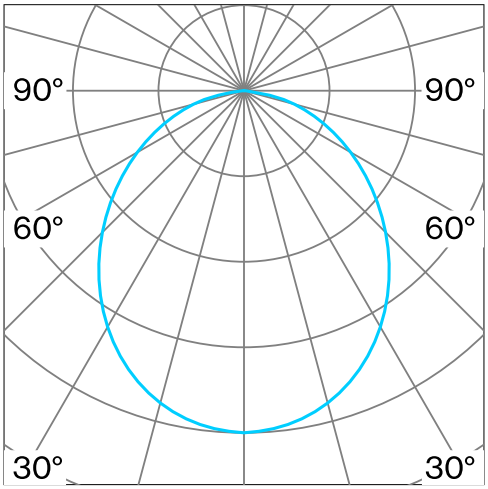

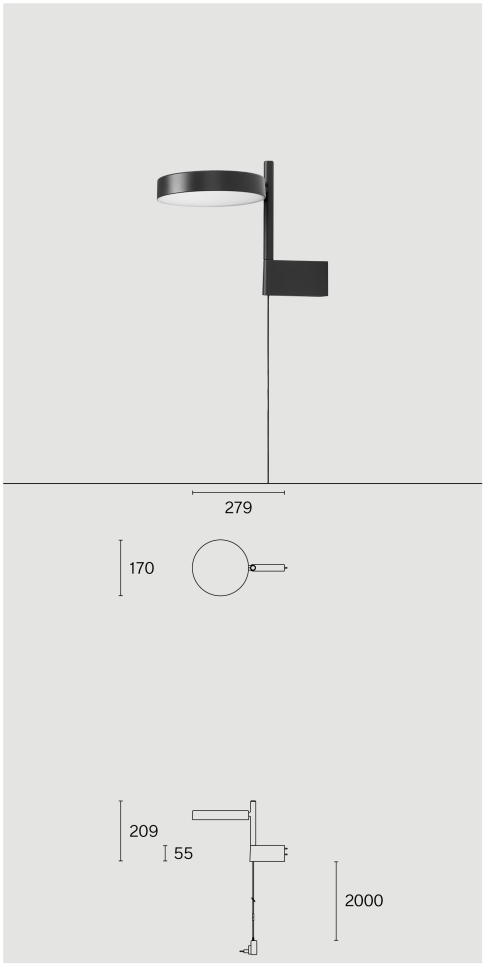

TECHNICAL INFORMATION

Physical	
Material	Lamp Body: Aluminium
IP Rating	IP20
Safety Class	Class II
LED	
Colour Rendering Index	CRI ≥ 98
Lumen Maintenance	L80 / 50000h
Macadam Ellipse	≤ 3 SDCM (initial MacAdam)

More technical information online

wastberg.com/en/products/pastille-bracket-short-w242br1

ARTICLE-SPECIFIC INFORMATION

Mounting	Wall
Luminous Flux	472 lm
Colour Temperature	2700 K
Optic	Opal
Control	Integrated dimmer switch
Voltage	100 - 240 V
Power	7.4 W
Weight	0.6 kg

Colour / Finish	**Art. No. / EAN code**
Jet black ●	**242BR10527** / 7330492011936

PASTILLE
BRACKET SHORT
W242BR1

Wastberg AB
T +46 10 16 15 010
info@wastberg.com
wastberg.com

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.