



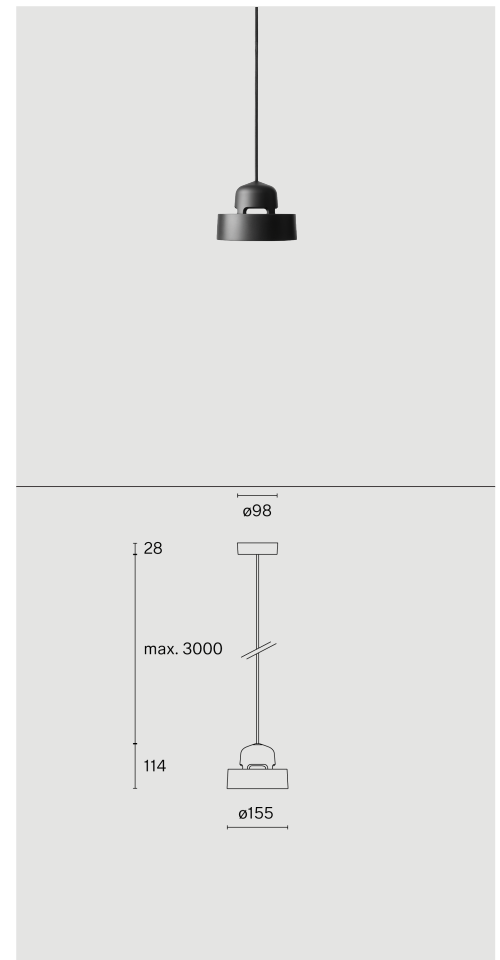

**DALSTON**  
SUSPENDED  
W162S3

Ceiling suspended luminaire with shade made from aluminium; textile cable max. 3000 mm and polyamide canopy; optical system with polycarbonate reflector and diffuser prism; surface Graphite black; RAL 9011; with COB (Chip on Board) technology for maximum efficiency; Phase-cut dim; light colour 2700 K;  $\leq 3$  SDCM (initial MacAdam); CRI  $\geq 90$ ; degree of protection IP20; Class 1; driver included; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear not replaceable;

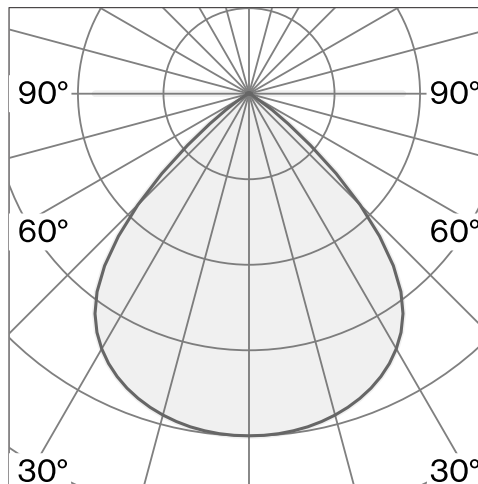

**TECHNICAL  
INFORMATION**

Physical	
Material	Shade: Aluminium, LED Engine: Aluminium
IP Rating	IP20
Safety Class	Class I
LED	
Colour Rendering Index	CRI $\geq 90$
Lumen Maintenance	L90 / 50000 h
Macadam Ellipse	$\leq 3$ SDCM (initial MacAdam)

More technical information online

[wastberg.com/en/products/dalston-suspended-w162s3](https://wastberg.com/en/products/dalston-suspended-w162s3)



**ARTICLE-SPECIFIC  
INFORMATION**

Mounting
Luminous Flux
Colour Temperature
Optic
Control
Voltage
Power
Weight
Colour / Finish
Graphite black

**DALSTON**  
SUSPENDED  
W162S3

Ceiling
552 lm
2700 K
super wide flood
Phase-cut dim
220 - 240 V
9.4 W
1.4 kg
Art. No. / EAN code
162S319011 / 7330492001135



**DALSTON**  
SUSPENDED  
W162S3

Accessories
1-PHASE TRACK ADAPTER White (incl strain relief, max. weight 10kg, no space for driver)
1-PHASE TRACK ADAPTER Black (incl strain relief, max. weight 10kg, no space for driver)
3-PHASE INTRACK ADAPTER White
3-PHASE INTRACK ADAPTER Black
3-PHASE TRACK ADAPTER White (incl strain relief PRO-M510)
3-PHASE TRACK ADAPTER Black (incl strain relief PRO-M510)
M13 STRAIN RELIEF Black (for cables Ø 6-9mm)
M13 STRAIN RELIEF White (for cables Ø 6-9mm)

Art. No. / EAN code / Price VAT excluded	
TRK-B100201	EUR
TRK-B100501	EUR
TRK-N300201	EUR
TRK-N300501	EUR
TRK-B300201	EUR
TRK-B300501	EUR
ACC-MNT017	EUR
ACC-MNT018	EUR