
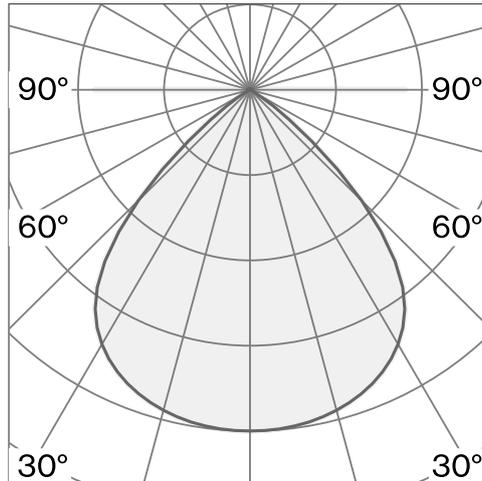


Ceiling suspended luminaire with shade made from aluminium; textile cable max. 3000 mm and polyamide canopy; optical system with polycarbonate reflector and diffuser prism; surface Graphite black; RAL 9011; with COB (Chip on Board) technology for maximum efficiency; Phase-cut dim; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90; degree of protection IP20; Class 1; driver included; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear not replaceable;

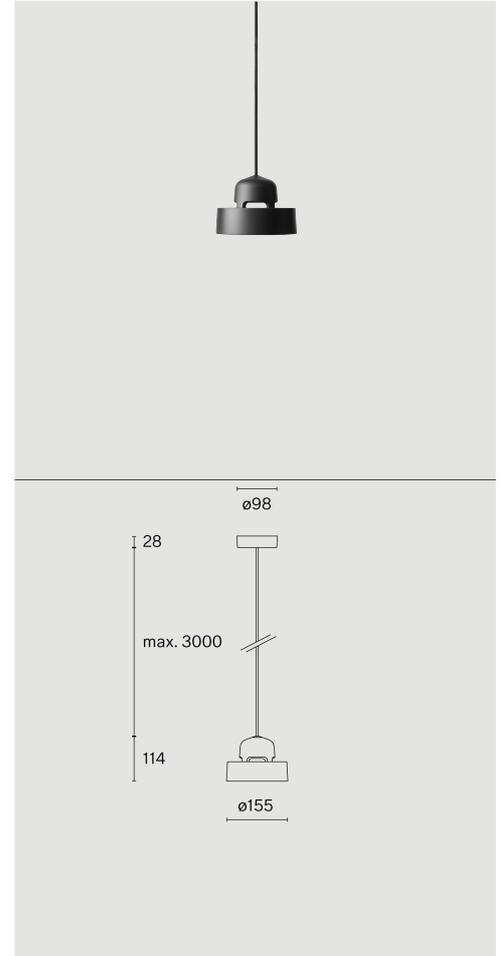

TECHNICAL INFORMATION

Physical	
Material	Shade: Aluminium, LED Engine: Aluminium
IP Rating	IP20
Safety Class	Class I

LED

Colour Rendering Index	CRI ≥ 90
Lumen Maintenance	L90 / 50000 h
Macadam Ellipse	≤ 3 SDCM (initial MacAdam)

More technical information online

wastberg.com/en/products/dalston-suspended-w162s3



ARTICLE-SPECIFIC INFORMATION

Mounting	Ceiling
Luminous Flux	552 lm
Colour Temperature	2700 K
Optic	super wide flood
Control	Phase-cut dim
Voltage	220 - 240 V
Power	9.4 W
Weight	1.4 kg

Colour / Finish	Graphite black ●
------------------------	------------------

DALSTON SUSPENDED W162S3

Ceiling	Ceiling
Luminous Flux	552 lm
Colour Temperature	2700 K
Optic	super wide flood
Control	Phase-cut dim
Voltage	220 - 240 V
Power	9.4 W
Weight	1.4 kg

Art. No. / EAN code	162S319011 / 7330492001135
----------------------------	----------------------------