
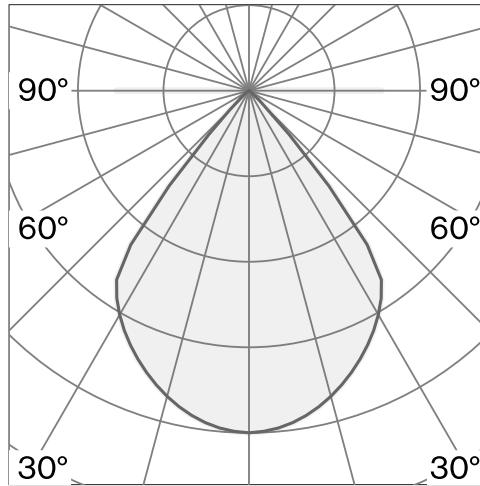


Ceiling surface luminaire; aluminium body and polycarbonate canopy; surface Pale green; NCS S 2005-B50G; PMMA lens and polycarbonate reflector; with COB (Chip on Board) technology for maximum efficiency; DALI Push dim; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; degree of protection IP20; Class 1; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear not replaceable;

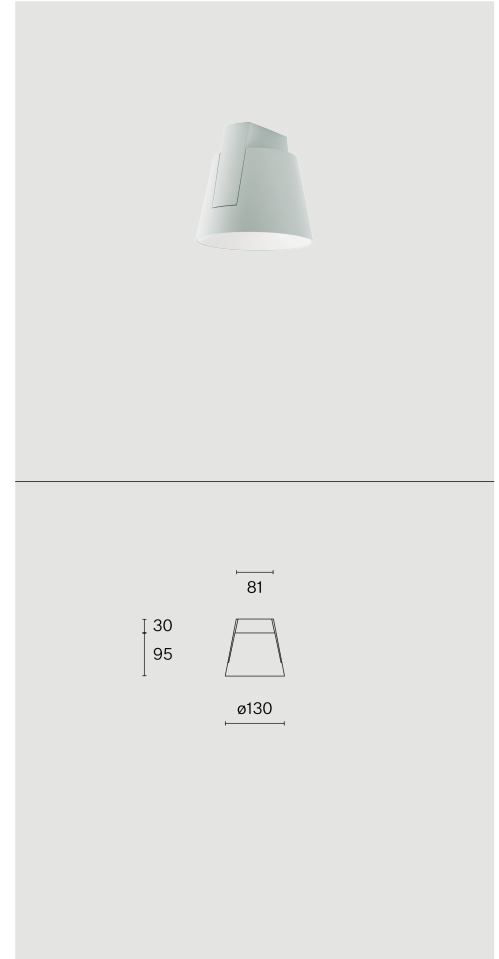

TECHNICAL INFORMATION

| | |
|---------------------|----------------------|
| Physical | |
| Material | Lamp Body: Aluminium |
| IP Rating | IP20 |
| Safety Class | Class I |

| | |
|-------------------------------|---------------------------------|
| LED | |
| Colour Rendering Index | CRI ≥ 90 |
| Lumen Maintenance | L80 / 50000h |
| Macadam Ellipse | ≤ 3 SDCM (initial MacAdam) |

More technical information online

wastberg.com/en/products/focal-ceiling-w222c



ARTICLE-SPECIFIC INFORMATION

| |
|---------------------------|
| Mounting |
| Luminous Flux |
| Colour Temperature |
| Optic |
| Control |
| Voltage |
| Power |
| Weight |

| | |
|------------------------|--------------|
| Colour / Finish | Pale green ● |
|------------------------|--------------|

FOCAL CEILING W222C

| |
|------------------|
| Ceiling |
| 995 lm |
| 2700 K |
| super wide flood |
| DALI Push dim |
| 220 - 240 V |
| 10.5 W |
| 0.5 kg |

| | |
|----------------------------|----------------------------|
| Art. No. / EAN code | 222C101272 / 7330492000398 |
|----------------------------|----------------------------|