

DALSTON
SUSPENDED
W162S2

Ceiling suspended luminaire with shade made from aluminium; textile cable max. 3000mm and polyamide canopy; optical system with polycarbonate reflector and diffuser prism; surface Graphite black; RAL 9011; with COB (Chip on Board) technology for maximum efficiency; Phase-cut dim; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90; degree of protection IP20; Class 1; driver included; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear not replaceable;



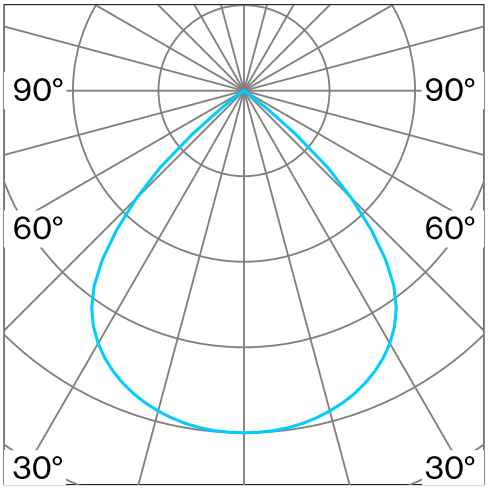

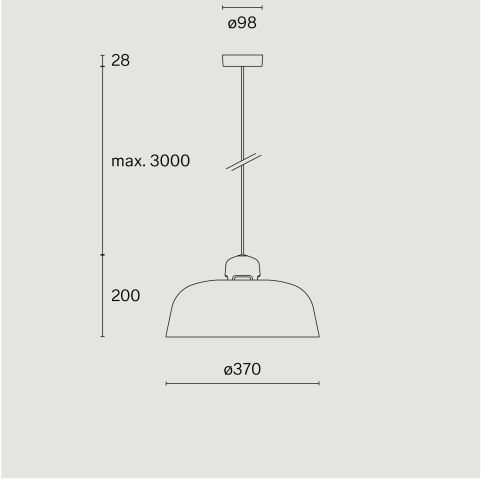

TECHNICAL INFORMATION

Physical	
Material	Shade: Aluminium, LED Engine: Aluminium
IP Rating	IP20
Safety Class	Class I

LED	
Colour Rendering Index	CRI ≥ 90
Lumen Maintenance	L90 / 50000 h
Macadam Ellipse	≤ 3 SDCM (initial MacAdam)

More technical information online

wastberg.com/en/products/dalston-suspended-w162s2

ARTICLE-SPECIFIC INFORMATION

Mounting	Ceiling
Luminous Flux	538 lm
Colour Temperature	2700 K
Control	Phase-cut dim
Voltage	220 - 240 V
Power	9.4 W
Weight	1.6 kg

Colour / Finish	Art. No. / EAN code
Graphite black	**162S219011** / 7330492009322

DALSTON
SUSPENDED
W162S2

Wastberg AB
T +46 10 16 15 010
info@wastberg.com
wastberg.com

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.