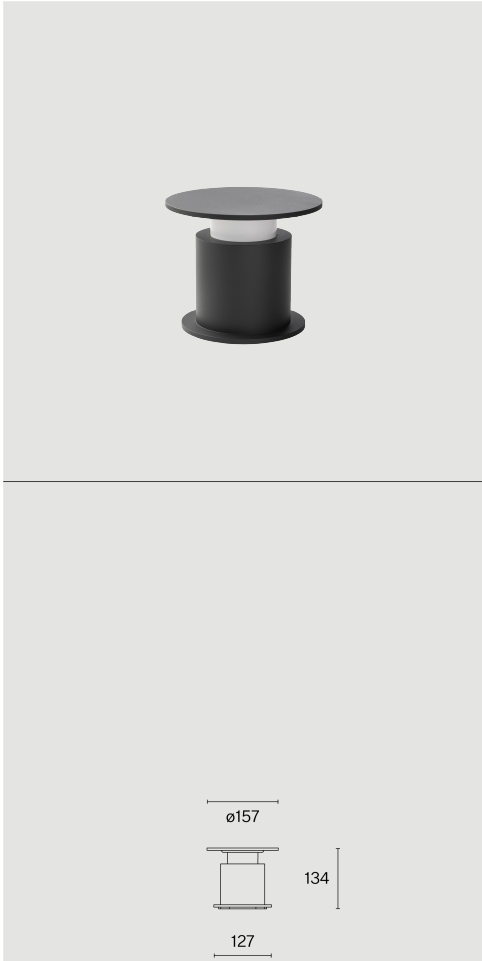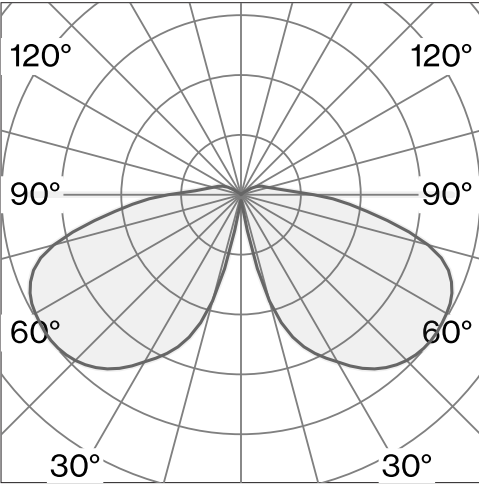# W+

FARO
TABLE
W241

Table luminaire made from aluminium; surface Black grey; RAL 7012; optical system with integrated led, polycarbonate lens; light colour 2700 K; CRI ≥ 90; degree of protection IP54; Class 3; wireless fixture with battery (LiFePo4) included; charging adapter and cable not included; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear replaceable by an authorized professional;

ø157

134

127

TECHNICAL INFORMATION

Physical

Material	Shade & Base: Aluminium
IP Rating	IP54
Safety Class	Class III

LED

Colour Rendering Index	CRI ≥ 90
Lumen Maintenance	L80 / 50000h

More technical information online

wastberg.com/en/products/faro-table-w241

ARTICLE-SPECIFIC INFORMATION

Mounting	
Luminous Flux	
Colour Temperature	
Control	
Voltage	
Power	
Weight	

Colour / Finish

Black grey ●

FARO
TABLE
W241

Table	
237 lm	
2700 K	
Dimmable	
5 V	
3.5 W	
11 kg	

Art. No. / EAN code

241T10427 / 7330492001784

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Accessories	Art. No. / EAN code / Price VAT excluded	
CABLE Black	CABLE-001	**8 EUR**
CHARGING ADAPTER Black (EU plug)	CHARGER-001	**28 EUR**
CHARGING HUB Black (EU plug)	HUB-001	**100 EUR**
MASTER DIMMING DEVICE (up to 25 lamps)	REMOTE-001	**450 EUR**

	CABLE-001	**8 EUR**
	CHARGER-001	**28 EUR**

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.