BELL
SUSPENDED
W131

Ceiling suspended luminaire made from die-cast aluminium; surface Sapphire blue; matt texture; RAL 5003; PMMA lens and polycarbonate reflector; lamp socket GU10; lamp type PAR16; Phase-cut dim; light colour 2700 K; CRI ≥ 90; degree of protection IP20; Class 2; textile cable max. 2800mm and polyamide canopy; lamp included; driver included; light source replaceable by end-user; control gear not replaceable;

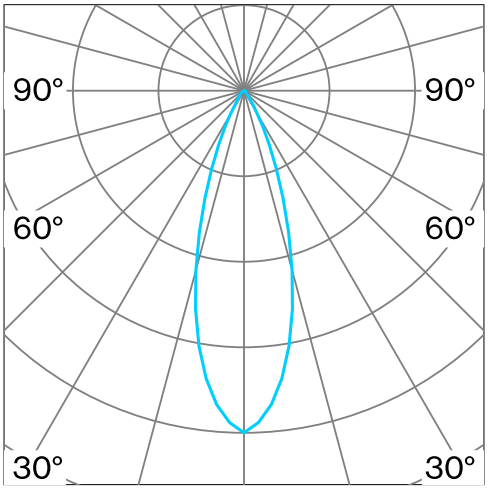

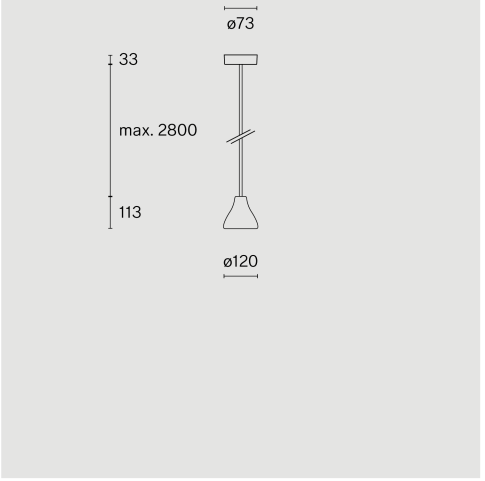

TECHNICAL INFORMATION

Physical	
Material	Shade: Aluminium
IP Rating	IP20
Safety Class	Class II

LED	
Colour Rendering Index	CRI ≥ 90
Lumen Maintenance	L70 / 25000h

More technical information online

wastberg.com/en/products/bell-suspended-w131

ARTICLE-SPECIFIC INFORMATION

Mounting	Ceiling
Luminous Flux	506 lm
Colour Temperature	2700 K
Control	Phase-cut dim
Voltage	110 - 240 V
Power	6.5 W
Weight	0.6 kg

Colour / Finish	Art. No. / EAN code
Sapphire blue	**131S1500327** / 7330492002293

BELL
SUSPENDED
W131

Wastberg AB
T +46 10 16 15 010
info@wastberg.com
wastberg.com

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.