
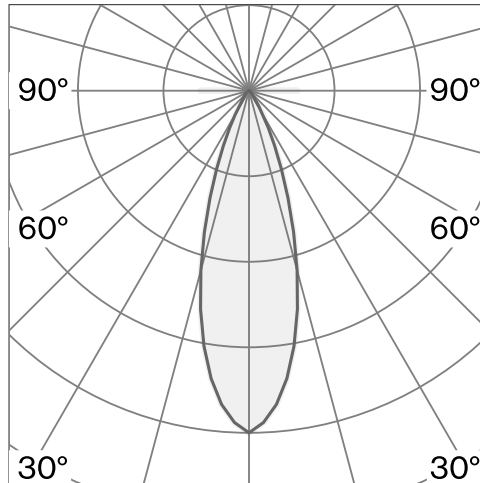


BELL
SUSPENDED
W131

Ceiling suspended luminaire made from die-cast aluminium; surface Traffic red; matt texture; RAL 3020; PMMA lens and polycarbonate reflector; lamp socket GU10; lamp type PAR16; Phase-cut dim; light colour 2700 K; CRI ≥ 90; degree of protection IP20; Class 2; textile cable max. 2800 mm and polyamide canopy; lamp included; driver included; light source replaceable by end-user; control gear not replaceable;

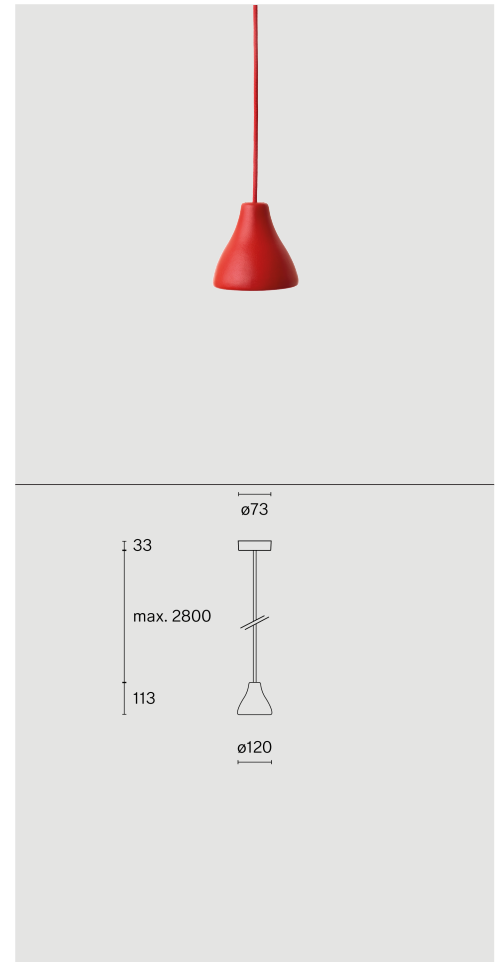

TECHNICAL INFORMATION

Physical	
Material	Shade: Aluminium
IP Rating	IP20
Safety Class	Class II

LED	
Colour Rendering Index	CRI ≥ 90
Lumen Maintenance	L70 / 25000h

ARTICLE-SPECIFIC INFORMATION

Mounting	Ceiling
Luminous Flux	506 lm
Colour Temperature	2700 K
Control	Phase-cut dim
Voltage	110 - 240 V
Power	6.5 W
Weight	0.6 kg

Colour / Finish	Traffic red ●
------------------------	--

BELL
SUSPENDED
W131

Ceiling	Ceiling
Luminous Flux	506 lm
Colour Temperature	2700 K
Control	Phase-cut dim
Voltage	110 - 240 V
Power	6.5 W
Weight	0.6 kg

Art. No. / EAN code	131S1302027 / 7330492002286
----------------------------	-----------------------------

More technical information online

wastberg.com/en/products/bell-suspended-w131

