ION
FLOOR
W225F2

Free standing floor luminaire made from aluminium; surface Traffic white; RAL 9016; polyamide glare shade and polycarbonate lens; with COB (Chip on Board) technology for maximum efficiency; integrated dimmer switch; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 98; degree of protection IP20; Class 2; incl. 2000mm white cable plug; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear replaceable by end-user;

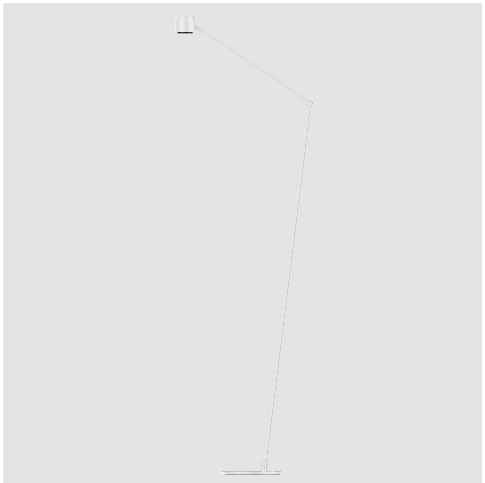

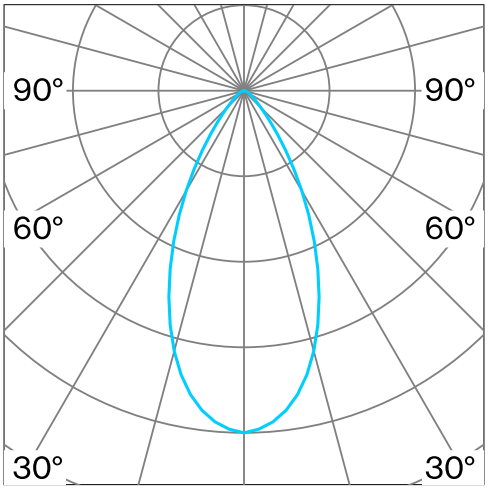

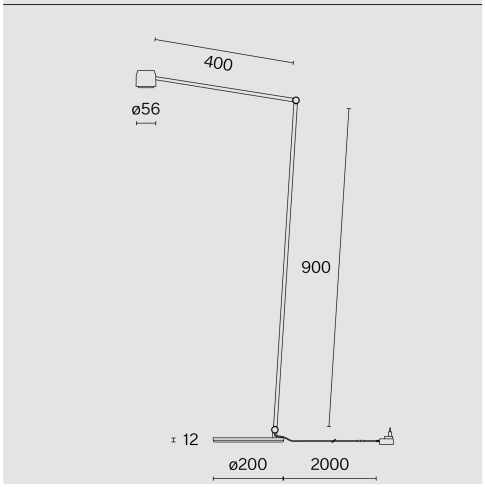

TECHNICAL INFORMATION

Physical	
Material	Lamp Body: Aluminium
IP Rating	IP20
Safety Class	Class II
LED	
Colour Rendering Index	CRI ≥ 98
Lumen Maintenance	L80 / 50000h
Macadam Ellipse	≤ 3 SDCM (initial MacAdam)

More technical information online

wastberg.com/en/products/ion-floor-w225f2

ARTICLE-SPECIFIC INFORMATION

Mounting	Floor
Luminous Flux	490 lm
Colour Temperature	2700 K
Optic	Narrow
Control	Integrated dimmer switch
Voltage	100 - 240 V
Power	8.3 W
Weight	3.2 kg

Colour / Finish
Traffic white

ION
FLOOR
W225F2

Art. No. / EAN code
225F20227N / 7330492017204

Wastberg AB
T +46 10 16 15 010
info@wastberg.com
wastberg.com

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.