

HALO
SUSPENDED
W202S2

Round ceiling suspended luminaire made from artisanal handblown glass; surface White; aluminium heat sink and top plate; polycarbonate canopy; with COB (Chip on Board) technology for maximum efficiency; Phase-cut dim; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 98; degree of protection IP20; Class 2; inclusive cable suspension max. 3000mm; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear not replaceable;



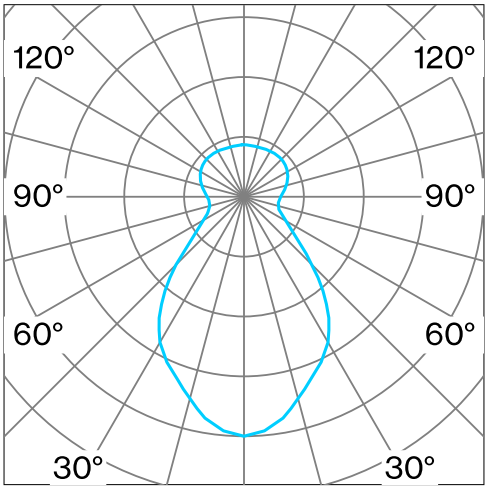

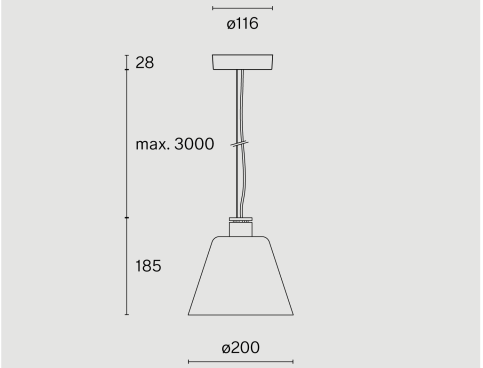

TECHNICAL INFORMATION

Physical	
Material	Shade & Bulb: Opal Glass
IP Rating	IP20
Safety Class	Class II
LED	
Colour Rendering Index	CRI ≥ 98
Lumen Maintenance	L80 / 50000h
Macadam Ellipse	≤ 3 SDCM (initial MacAdam)

More technical information online

wastberg.com/en/products/halo-suspended-w202s2

ARTICLE-SPECIFIC INFORMATION

HALO
SUSPENDED
W202S2

Mounting	Ceiling
Luminous Flux	454 lm
Colour Temperature	2700 K
Optic	Opal
Control	Phase-cut dim
Voltage	220 - 240 V
Power	7.3 W
Weight	1.2 kg

Colour / Finish	**Art. No. / EAN code**
White	**202S200** / 7330492008691

Wastberg AB
T +46 10 16 15 010
info@wastberg.com
wastberg.com

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.