


ALTO
SUSPENDED
W164S1R

Ceiling suspended luminaire made from aluminium; ceiling recessed canopy; polycarbonate reflector and glass cover; surface Jet black; RAL 9005; with COB (Chip on Board) technology for maximum efficiency; DALI Push dim; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90; indirect light distribution; degree of protection IP20; Class 1; shortable pendant rod suspension 1200mm; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear not replaceable;

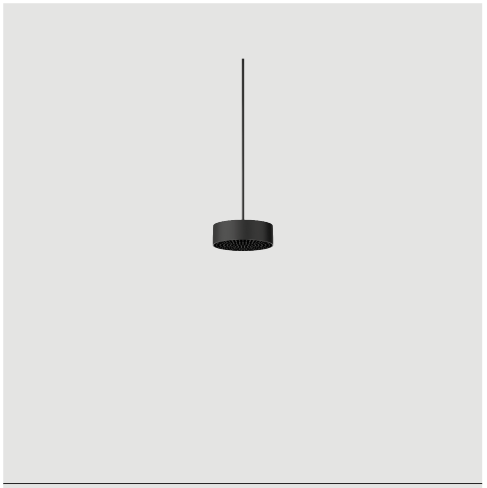

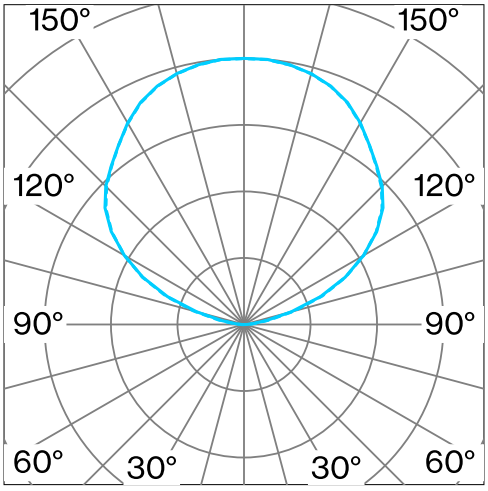

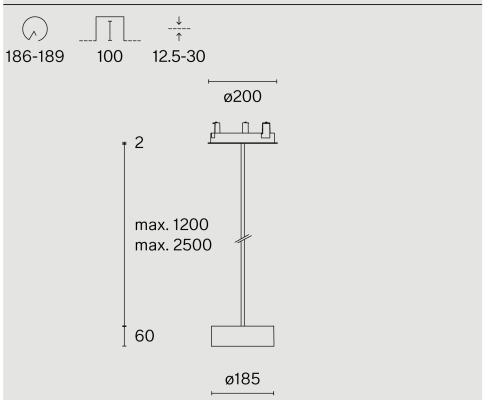

TECHNICAL INFORMATION

Physical	
Material	Lamp Body, Canopy & Rod: Aluminium
IP Rating	IP20
Safety Class	Class I
LED	
Colour Rendering Index	CRI ≥ 90
Lumen Maintenance	L80 / 50000h
Macadam Ellipse	≤ 3 SDCM (initial MacAdam)

More technical information online

wastberg.com/en/products/alto-suspended-w164s1r

ARTICLE-SPECIFIC INFORMATION

ALTO
SUSPENDED
W164S1R

Mounting	Ceiling
Luminous Flux	11400 lm
Colour Temperature	2700 K
Control	DALI Push dim
Voltage	220 - 240 V
Power	96 W
Weight	2.8 kg

Colour / Finish	**Art. No. / EAN code**
Jet black ●	**164S1R105272** / 7330492016788

Wastberg AB
T +46 10 16 15 010
info@wastberg.com
wastberg.com

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.