CONE
SUSPENDED XS
W151XS3

Ceiling suspended luminaire with shade made from aluminium; polycarbonate canopy; optical system with acrylic diffuser; integrated LED light source; surface Raw aluminium; inclusive cable suspension max. 3000mm; DALI Push dim; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 98; degree of protection IP20; Class 2; driver included; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear replaceable by end-user;



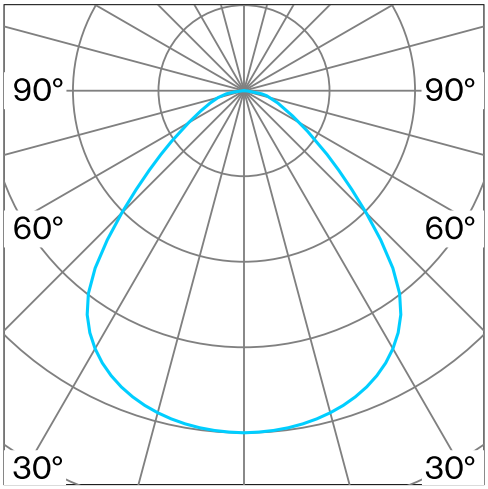

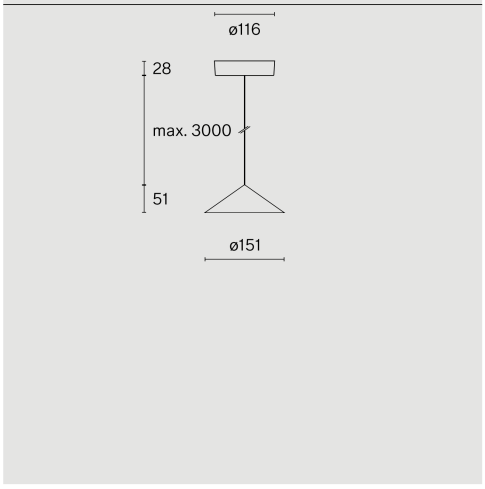

TECHNICAL INFORMATION

Physical	
Material	Shade: Aluminium
IP Rating	IP20
Safety Class	Class II
LED	
Colour Rendering Index	CRI ≥ 98
Lumen Maintenance	L90 / 50000 h
Macadam Ellipse	≤ 3 SDCM (initial MacAdam)

ARTICLE-SPECIFIC INFORMATION

Mounting	Ceiling
Luminous Flux	567 lm
Colour Temperature	2700 K
Control	DALI Push dim
Voltage	220 - 240 V
Power	10.7 W
Weight	0.8 kg
Colour / Finish	
Raw aluminium	

CONE
SUSPENDED XS
W151XS3

Art. No. / EAN code
151XS320272 / 7330492018225

More technical information online

wastberg.com/en/products/cone-suspended-xs-w151xs3-4f89b4yphb3dx8rq-4f89b4yphb3dx8rq-4f89b4yphb3dx8rq

Wastberg AB
T +46 10 16 15 010
info@wastberg.com
wastberg.com

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.