**CHIPPERFIELD**
FLOOR
W102F

Free standing floor luminaire made from steel; surface Dark steel; ABS dimmer housing; polycarbonate diffuser and reflector; with COB (Chip on Board) technology for maximum efficiency; integrated dimmer switch; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 98; degree of protection IP20; Class 2; incl. 2036 mm black cable plug; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear replaceable by end-user;

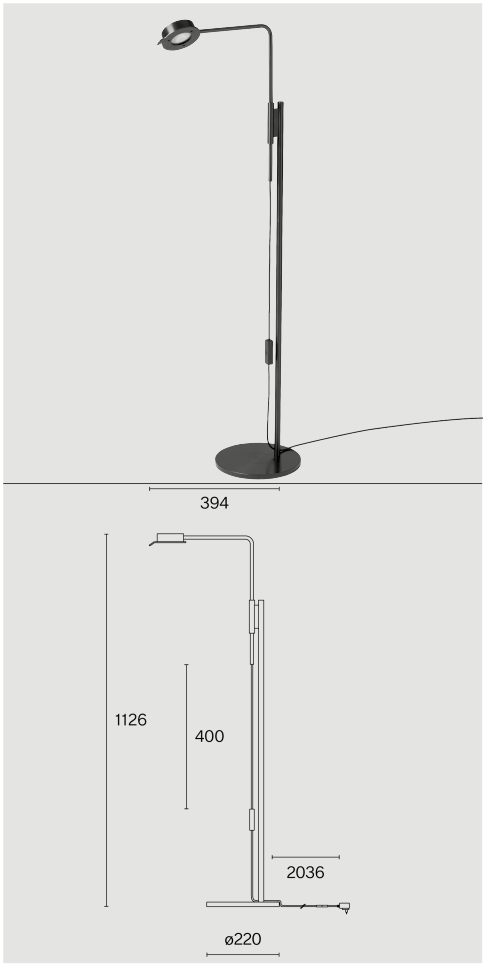


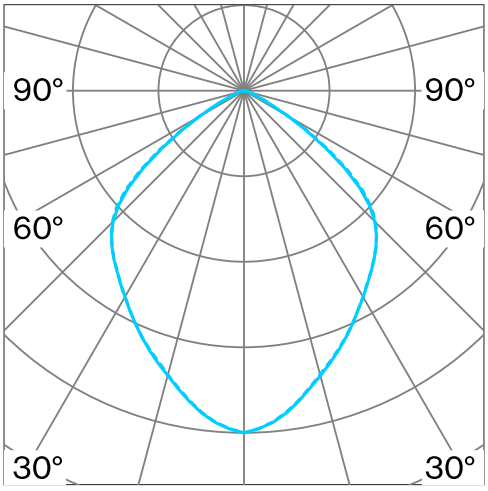


## TECHNICAL INFORMATION

| Physical | |
|---|---|
| **Material** | Lamp Body: Dark steel, Floor Base: Dark steel |
| **IP Rating** | IP20 |
| **Safety Class** | Class II |

| LED | |
|---|---|
| **Colour Rendering Index** | CRI ≥ 98 |
| **Lumen Maintenance** | L80 / 50000h |
| **Macadam Ellipse** | ≤ 3 SDCM (initial MacAdam) |

More technical information online

wastberg.com/en/products/chipperfield-floor-w102f

## ARTICLE-SPECIFIC INFORMATION

| | |
|---|---|
| **Mounting** | Floor |
| **Luminous Flux** | 465 lm |
| **Colour Temperature** | 2700 K |
| **Control** | Dimmer switch on cord |
| **Voltage** | 100 - 240 V |
| **Power** | 7.3 W |
| **Weight** | 6.2 kg |

| Colour / Finish |
|---|
| Dark steel |

| Art. No. / EAN code |
|---|
| **102F105** / 7330492008509 |

**CHIPPERFIELD**
FLOOR
W102F

Wastberg AB
T +46 10 16 15 010
info@wastberg.com
wastberg.com

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.