**CONE**
SUSPENDED M
W151M2

Ceiling suspended luminaire with shade made from aluminium; polycarbonate canopy; optical system with acrylic diffuser; integrated LED light source; surface Jet black; RAL 9005; inclusive cable suspension max. 3000mm; DALI Push dim; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90; degree of protection IP20; Class 1; driver included; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear not replaceable;



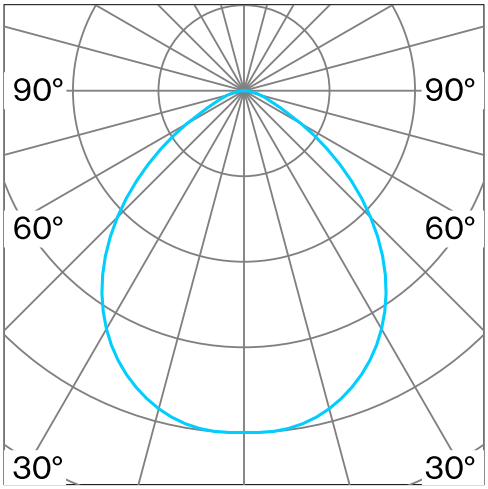


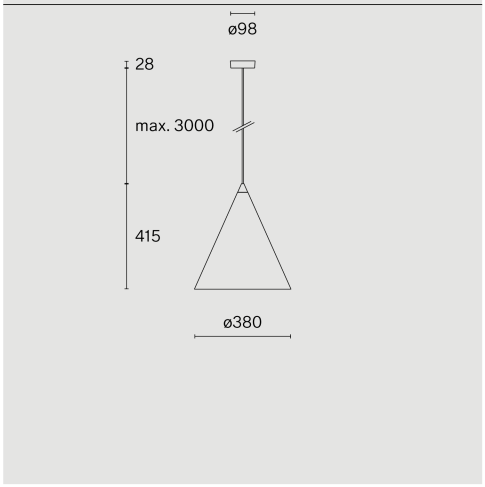


## TECHNICAL INFORMATION

| Physical | |
|---|---|
| **Material** | Shade: Aluminium |
| **IP Rating** | IP20 |
| **Safety Class** | Class I |

| LED | |
|---|---|
| **Colour Rendering Index** | CRI ≥ 90 |
| **Lumen Maintenance** | L80 / 50000 h |
| **Macadam Ellipse** | ≤ 3 SDCM (initial MacAdam) |

More technical information online

wastberg.com/en/products/cone-suspended-m-w151m2

## ARTICLE-SPECIFIC INFORMATION

| | |
|---|---|
| **Mounting** | Ceiling |
| **Luminous Flux** | 429 lm |
| **Colour Temperature** | 2700 K |
| **Control** | DALI Push dim |
| **Voltage** | 220 - 240 V |
| **Power** | 11.2 W |
| **Weight** | 2.1 kg |

| Colour / Finish | Art. No. / EAN code |
|---|---|
| Jet black ● | **151M205272** / 7330492017747 |

**CONE**
SUSPENDED M
W151M2

Wastberg AB
T +46 10 16 15 010
info@wastberg.com
wastberg.com

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.