




**CAST**  
SEMI-RECESSED  
W261R

Ceiling semi-recessed luminaire; aluminium body; surface Traffic white; RAL 9016; magnetic interchangeable lenses allow quick switching between three beam angles: 15°, 36° and 56°; with COB (Chip on Board) technology for maximum efficiency; DALI Push dim; light colour 2700 K;  $\leq 3$  SDCM (initial MacAdam); CRI  $\geq 90$ ; degree of protection IP20; Class 2; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear replaceable by end-user;

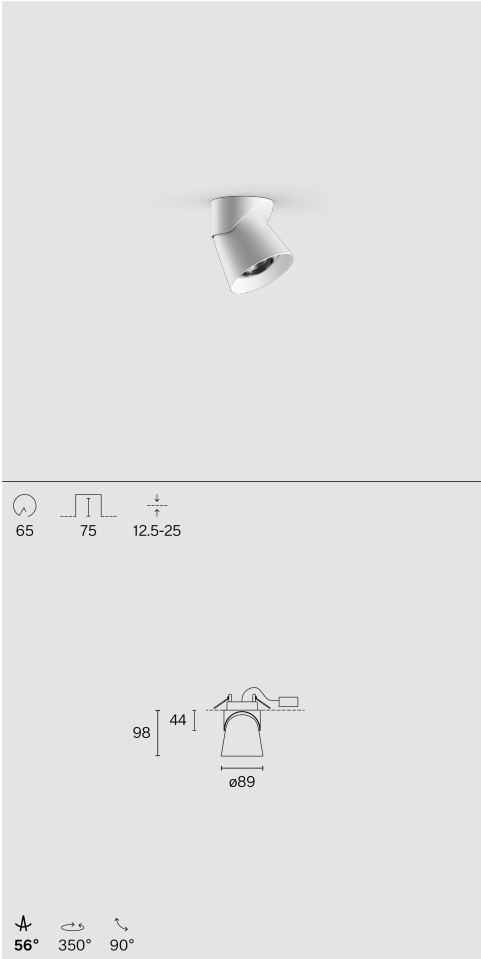

**TECHNICAL  
INFORMATION**

|                        |                                 |
|------------------------|---------------------------------|
| Physical               |                                 |
| Material               | Lamp Body: Aluminium            |
| IP Rating              | IP20                            |
| Safety Class           | Class II                        |
| LED                    |                                 |
| Colour Rendering Index | CRI $\geq 90$                   |
| Lumen Maintenance      | L80 / 50000h                    |
| Macadam Ellipse        | $\leq 3$ SDCM (initial MacAdam) |

More technical information online  
[wastberg.com/en/products/cast-semi-recessed-w261r](https://wastberg.com/en/products/cast-semi-recessed-w261r)



**ARTICLE-SPECIFIC  
INFORMATION**

|                    |  |
|--------------------|--|
| Mounting           |  |
| Luminous Flux      |  |
| Colour Temperature |  |
| Optic              |  |
| Control            |  |
| Voltage            |  |
| Power              |  |
| Weight             |  |
| Colour / Finish    |  |
| Traffic white      |  |

**CAST**  
SEMI-RECESSED  
W261R

|                             |  |
|-----------------------------|--|
| Ceiling                     |  |
| 1150 lm                     |  |
| 2700 K                      |  |
| Flood                       |  |
| DALI Push dim               |  |
| 220-240 V                   |  |
| 9.9 W                       |  |
| 0.6 kg                      |  |
| Art. No. / EAN code         |  |
| 261R1227402 / 7330492018973 |  |