


Ceiling surface luminaire; aluminium body; surface Anthracite; magnetic interchangeable lenses allow quick switching between three beam angles: 15°, 36° and 56°; with COB (Chip on Board) technology for maximum efficiency; DALI Push dim; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; degree of protection IP20; Class 2; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear replaceable by end-user;

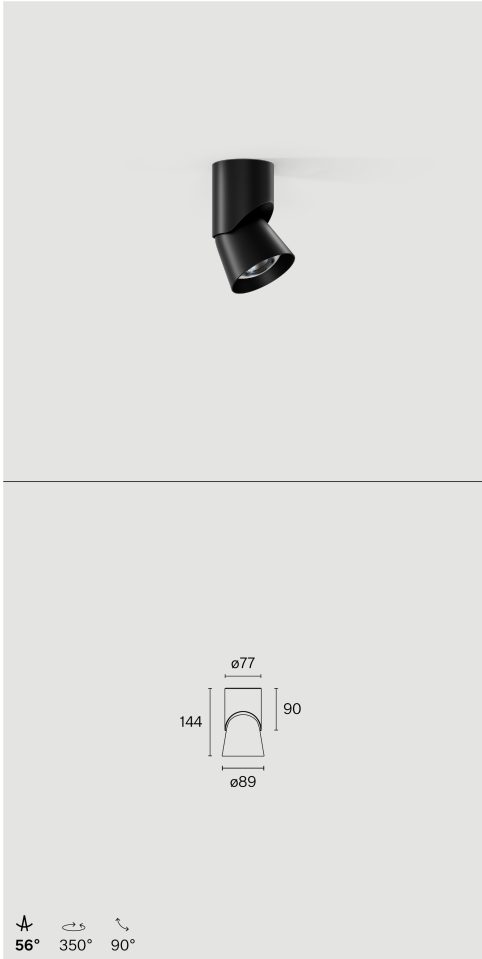

TECHNICAL INFORMATION

Physical	
Material	Lamp Body: Aluminium
IP Rating	IP20
Safety Class	Class II
LED	
Colour Rendering Index	CRI ≥ 90
Lumen Maintenance	L80 / 50000h
Macadam Ellipse	≤ 3 SDCM (initial MacAdam)

More technical information online
wastberg.com/en/products/cast-ceiling-w261c



ARTICLE-SPECIFIC INFORMATION

Mounting
Luminous Flux
Colour Temperature
Optic
Control
Voltage
Power
Weight
Colour / Finish
Anthracite

CAST
CEILING
W261C

Ceiling	
1140 lm	
2700 K	
Flood	
DALI Push dim	
220-240 V	
9.9 W	
0.7 kg	
Art. No. / EAN code	
261C1227405 / 7330492018485	