

ILUMINA
TABLE
W203

Table luminaire, shade and base made from aluminium; surface Raw aluminium; dimmer knob, internal structure and reflector from ABS; polycarbonate diffuser; with COB (Chip on Board) technology for maximum efficiency; integrated sliding dimmer potentiometer; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90; degree of protection IP20; Class 2; incl. 1800mm black cable plug; inclusive on/off switch in black; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear replaceable by end-user;



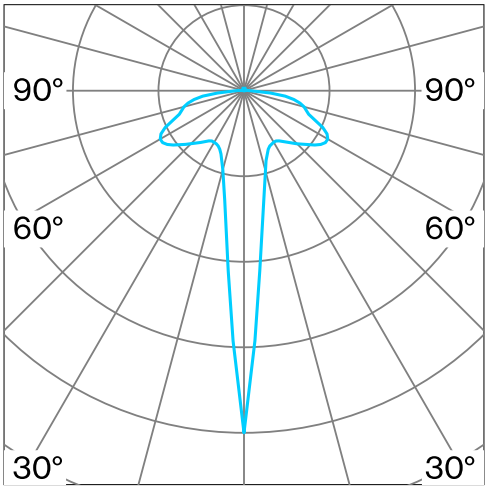

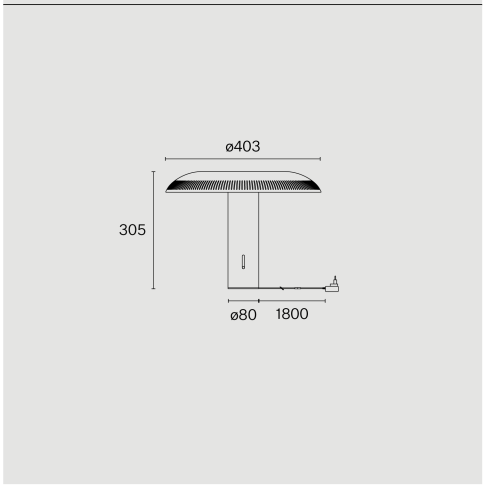

TECHNICAL INFORMATION

Physical	
Material	Shade & Base: Aluminium
IP Rating	IP20
Safety Class	Class II
LED	
Colour Rendering Index	CRI ≥ 90
Lumen Maintenance	L80 / 50000h
Macadam Ellipse	≤ 3 SDCM (initial MacAdam)

More technical information online

wastberg.com/en/products/ilumina-table-w203

ARTICLE-SPECIFIC INFORMATION

Mounting	Table
Luminous Flux	232 lm
Colour Temperature	2700 K
Control	Integrated sliding dimmer potentiometer
Voltage	100 - 240 V
Power	7.2 W
Weight	1.6 kg

Colour / Finish	**Art. No. / EAN code**
Raw aluminium	**203T200** / 7330492008738

ILUMINA
TABLE
W203

Wastberg AB
T +46 10 16 15 010
info@wastberg.com
wastberg.com

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.