
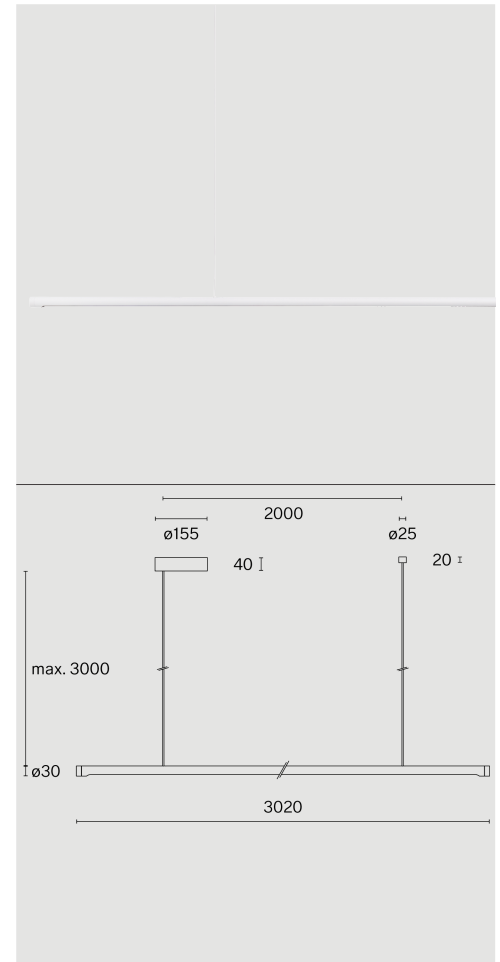


Ceiling suspended luminaire made from die-cast aluminium; optical system with 176 individual anti-glare chambers; surface Traffic white; RAL 9016; DALI Push dim; light colour 3000 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; degree of protection IP20; Class 2; inclusive cable suspension max. 3000 mm; driver included; light source replaceable by Wastberg+ or by a professional with explicit authorization; control gear replaceable by end-user;

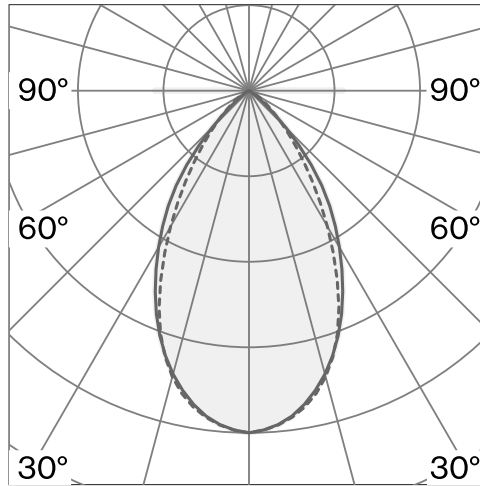

TECHNICAL INFORMATION

Physical	
Material	Lamp Body: Aluminium
IP Rating	IP20
Safety Class	Class II

LED	
Colour Rendering Index	CRI ≥ 90
Lumen Maintenance	L80 / 50000h
Macadam Ellipse	≤ 3 SDCM (initial MacAdam)

More technical information online
wastberg.com/en/products/linier-suspended-w181s2



ARTICLE-SPECIFIC INFORMATION

Mounting	Ceiling
Luminous Flux	4120 lm
Colour Temperature	3000 K
Control	DALI Push dim
Voltage	220 - 240 V
Power	42 W
Weight	2.7 kg

Colour / Finish	Traffic white
-----------------	---------------

LINIER SUSPENDED W181S2

Ceiling	4120 lm
	3000 K
	DALI Push dim
	220 - 240 V
	42 W
	2.7 kg

Art. No. / EAN code	181S202302 / 7330492016498
---------------------	----------------------------