

EPD of multiple products, based on a representative product in accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

LINIER W181

Including multiple products of LINIER collection. Included products are specified on page 4.

One of the products not yet on the market – Results of this EPD shall be used with care as the LCI data for one of the products is not yet based on 1 year of production which may result in increased uncertainty.

Programme	The International EPD® System www.environdec.com
Programme operator	EPD International AB
EPD Registration number	EPD-IES-0028703:001
Version date	2026-03-12
Validity date	2031-03-11

Programme information**Programme**

The International EPD® System

Address

EPD International AB
Box 210 60
SE-100 31 Stockholm
Sweden

Website

www.environdec.com

E-mail

support@environdec.com

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)

Product Category Rules (PCR)

PCR 2019:14 Construction products version 2.0.1. 2025-06-05.
UN CPC code(s): 4653 (Ver. 2.1) Lighting Equipment

PCR review was conducted by

The Technical Committee of the International EPD® System.
See www.environdec.com for a list of members.

Review Chair: Rob Rouwette (chair). Noa Meron (co-chair).

The review panel may be contacted via support@environdec.com

Life Cycle Assessment (LCA) Accountability

XAL GmbH, Auer-Welsbach-Gasse 36, 8055 Graz, Austria

Individual EPD verification without a pre-verified LCA/EPD tool.**Third-party verifier:**

Rubén Carnerero
IK INGENIERIA
Avd. Cervantes. 51 - 5º - Dpto 7
48970 Basauri (Bizkaia)
r.carnerero@ik-ingenieria.com

Procedure for follow-up of data during EPD validity involves third-party verifier:

Yes No

Approved by

The International EPD® System

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but published in different EPD programmes, may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

**Owner of the EPD**

Wastberg+
Box 5085
200 71 Malmö
Sweden

Contact

epd@wastberg.com

Description of the organisation

We create well-being through good light.

Working closely with leading architects and designers, we develop holistic lighting for humans and spaces.

Name and location of production site: The production site is located in Dongguan, Guangdong, China.

More information:

wastberg.com

**Product Name**

LINIER SUSPENDED W181


Product Identification

This EPD covers multiple products of the LINIER collection:

- LINIER SUSPENDED W181S1 – DALI Push dim (reference product)
- LINIER SUSPENDED W181S2 – DALI Push dim
- LINIER SUSPENDED W181S1 – Rotary dim


Scaling Factors for all variants can be found in the Annex of the EPD.

This EPD covers multiple variants of the LINIER collection:




LINIER
SUSPENDED
W181S1

DALI Push dim



LINIER
SUSPENDED
W181S2

DALI Push dim



LINIER
SUSPENDED
W181S1

Rotary dim

A LINEAR SPOTLIGHT

Defined by its strikingly slender form. Linier pairs strict minimalism with surprising performance and intuitive use. Carefully integrated optics deliver crisp, precisely directed light with zero glare – ideal for workspaces with high demands on quality, efficiency, and comfort. The longer pendant version features the same slender, linear proportions and perfectly balanced suspension points for optimal stability. Length 1515 mm, 3030 mm.

Design: Dirk Winkel Art. No. 181S205302, Art. No. 181S105402, Art. No. 181S105273

TECHNICAL SPECIFICATIONS	LINIER SUSPENDED W181S1	LINIER SUSPENDED W181S2	LINIER SUSPENDED W181S1
Inset power	20.9 W	41.8 W	20.9 W
Luminous efficiency	Up to 102 lm/W	Up to 101 lm/W	Up to 99 lm/W
Colour temperature	3000 K, 4000 K	3000 K, 4000 K	2700 K, 3000 K
Light control	DALI Push dim	DALI Push dim	Rotary dim
Physical	Length 1515 mm Diameter 30 mm	Length 3030 mm Diameter 30 mm	Length 1515 mm Diameter 30 mm

Technical data was tested in house according to following standards:

EN 13032-1: 2004 +A1: 2012

EN 13032-4: 2015 +A1: 2019

CIE S 025/E: 2015

IES LM-79-19: 2019

UN CPC code(s):

4653 (Ver. 2.1) Lighting Equipment

**CONTENT DECLARATION
PER DECLARED UNIT**

PRODUCT COMPONENTS	WEIGHT, KG	WEIGHT-% (VERSUS TOTAL WEIGHT)	POST-CONSUMER MATERIAL, WEIGHT-%	BIOGENIC MATERIAL, WEIGHT-% / DECLARED UNIT	BIOGENIC MATERIAL, KG C / DECLARED UNIT
Aluminum	0.89	52.99	0.00	0.00	0.00
Acrylonitrile Butadiene Styrene (ABS)	0.16	9.31	0.00	0.00	0.00
Polycarbonate	0.15	9.23	0.00	0.00	0.00
Polyphenylene ether (PPE)	0.12	7.17	0.00	0.00	0.00
Copper	0.11	6.33	0.00	0.00	0.00
Epoxy-Resin	0.06	3.31	0.00	0.00	0.00
Polyvinyl chloride (PVC)	0.04	2.36	0.00	0.00	0.00
Steel	0.04	2.13	0.00	0.00	0.00
Glass	0.02	1.42	0.00	0.00	0.00
Brass	0.02	1.04	0.00	0.00	0.00
Others (<1%)	0.06	4.62	0.00	0.00	0.00
TOTAL	1.67	100.00	0.00	0.00	0.00

PACKAGING MATERIALS*	WEIGHT, KG	WEIGHT-% (VERSUS THE PRODUCT)	WEIGHT BIOGENIC CARBON, KG C / DECLARED UNIT
Paper	1.08	64.61	0.55
Cardboard	0.03	1.82	0.02
Polyethylene film	0.09	5.70	0.00
Total	1.20	72.13	0.57

*Disclaimer: The packaging material table includes only product packaging. Transport packaging also included in the LCA.

The products do not contain any REACH and RoHS SVHC substances in amounts greater than 0.1% (1 000 ppm).

Declared unit

The declared unit is one piece of **Linier Suspended W181S1 DALI Push dim, 3000 K**. This product has been chosen as the reference due to the highest share of sales.

The weight of the product per declared unit is 1.67 kg.

For better comparison with other types of luminaires, conversion factors are also available to convert the results to 1000 lumens during a reference lifetime of 35000 hours. This reference value is proposed by the PEP Category rules (PSR-0014-ed2.0-EN-2023 07 13). The conversion factors are available under "Additional environmental information".

The principles of "Modularity" and "polluter pay" have been followed.

Reference service live

13.25 years

Time representativeness

2024 - 2025*

Database and LCA software used


LCA for Experts 10.9.3.14.

System boundaries

Cradle to gate with options, modules C1-C4, module D and with optional modules

*Some primary data (BoM and supplier data) is from a period < 12 months. It will be reviewed once one year of production is effective to confirm that the data is still representative.

System diagram

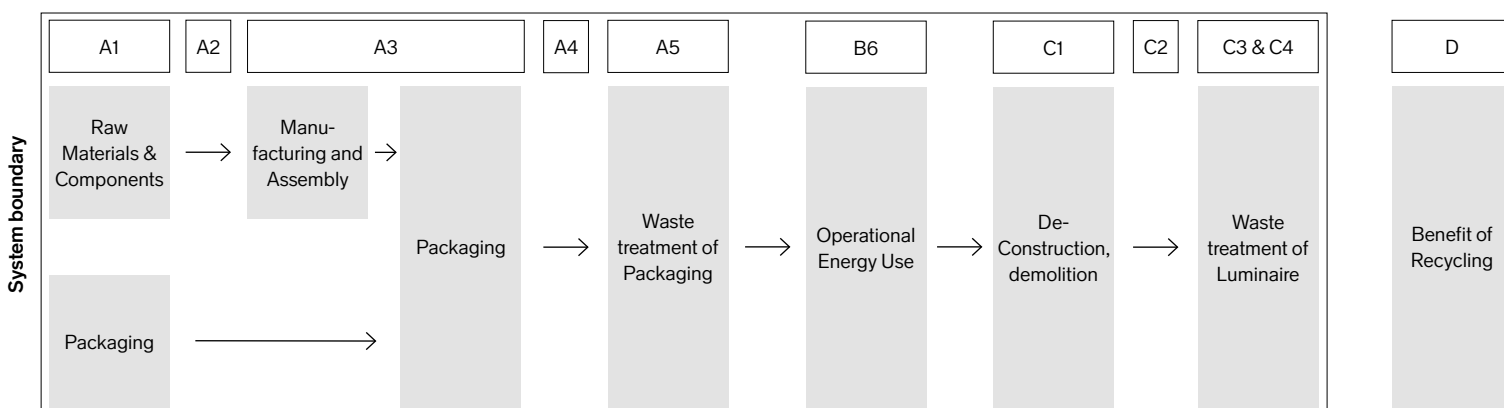

Allocation

Allocation by sales shares was done to identify the associated quantity of flows that are common for the factory: electricity and Natural gas for general factory needs and packaging, use of packaging materials and packaging waste from delivered components.

Product stage (A1 – A3)

Raw materials are found in the components used for the luminaire production. The raw materials and the necessary process steps have been modelled using LCA for Experts 10.9.3.14. The final assembly of the luminaire is done in Dongguan, China. The waste generated during the manufacturing process was handled in A3 according to the waste allocation method. Finished assembly and transportation to Belgium and from Belgium sales to the world. The corresponding electricity mix and natural gas have been used for manufacturing. Production losses are close to zero and therefore not included in the LCA. Transportation of all the components is incorporated. For the components which are delivered from China, aggregated data has been used, since transportation involved various routes and transport vehicles. It is calculated that 24% are delivered by plane route and 76% are delivered by ship route from Dongguan to Belgium. Packaging for the components has been accounted for using a worst-case approach.

Transport to building (A4)

The transport is calculated from Brussel to the capitals of the countries with sales shares >4% (Berlin, Brussels, London, Madrid, Stockholm, Vienna and Zurich). The product market includes countries all over the world.

Weighted distance	1274 km
Truck used	Class EURO 6, 26-28 t
Fuel type	Diesel (0.00287 l/100 kkm)

Installation into building (A5)

No emissions occur during the installation. This module includes the waste treatment of the packaging.

Packaging waste incl. transport packaging:

Material	Weight (kg)
Cardboard	1.56
Paper	0.18
Polyethylene film	0.09

Operational energy use (B6)

Electricity consumption during the use stage is modelled based on the technical parameters of the luminaires and is representative for a weighted average of the following applications –office (45%), hotel (20%), restaurant (15%), retail (15%), hospital (5%) with an average lifetime of 13.25 years. Geography of the electricity mix is modelled by sales shares and is representative for European countries (93.1% - EU-28) and rest of world countries (6.1%). For the rest of world countries, an electricity mix for China is used following a worst-case approach.

The energy consumption is calculated using the formula from EN 15193:2007:

$$\text{Energy consumption [kWh]} = \{Pa \times FCP \times FO \times (FD \times tD + FN \times tN) + Pp \times ty\} \times 1/1.000 \times a$$

The results and additional Use Phase Information is presented in the table below:

SCENARIO	LINIER SUSPENDED W181S1	UNIT
Electricity use (13.25 years)	1026.8	kWh
Active power	20.9	W
Total active time	46375	hours
Total passive time	69695	hours
Light control	DALI Push Ddim	-

End-of-life stage (C1-C4)

The product is presumed to be decomposed manually; therefore, no emissions should occur in C1. In accordance with PCR 2.0.1. the following transport distances are used for end-of-life waste treatment:

- Waste not destined for incineration: 80 km
- Waste destined for incineration: 130 km

Based on official statistics and literature, waste treatment options are taken into account for Europe and rest of the world countries.

SCENARIO	LINIER SUSPENDED W181S1	UNIT
Collected separately	1.670	kg
Collected with mixed (construction) waste	-	kg
For reuse	-	kg
For recycling	0.889	kg
For energy recovery	0.322	kg
For final disposal	0.460	kg

Module D

According to the guidelines of EN 15804+A2 and the PCR from EPD International, calculations are made for Module D. The loads and benefits result from the export of secondary materials and the energy which comes from incineration and landfilling. In Module D also the benefits from the product packaging waste are included.

SCENARIO	LINIER SUSPENDED W181S1	UNIT
Materials for recycling	2.325	kg
Materials for export of secondary fuels	-	kg
Materials for incineration	0.519	kg

Cut-off rules

Consistent with the PCR. a minimum of 95% of total inflows (mass and energy) are included. In addition, materials and processes with insignificant contributions of less than 1% are also included. For the use and end-of-life stage, scenarios are used, factoring in geographical conditions (such as electricity mix) and applications (waste treatment practices).

The following processes have been excluded:

- Manufacture of equipment used in production, buildings or any other capital goods;
- The transportation of personnel to the plant;
- Transportation of personnel within the plant;
- Research and development activities;
- Long-term emissions.

The following modules have been excluded:

- B1: For the use stage (B1), no energy and material inputs, or emissions are involved.
- B2-B5: During the reference service life no maintenance (B2), repair (B3), replacement (B4) or refurbishment (B5) is expected.
- B7: The use of the product does not require water consumption (B7).

Data quality

This LCA study reflects the production for 2025, while overhead electricity consumption is based on 2024/2025 data. Components are sourced from external suppliers, and their manufacturing processes are modeled using LCA for Experts, applying the most suitable representative geographical conditions and applications. Geographical representativeness is global, mainly China. One of the included products (LINIER W181S1 Rotary dim) is not yet on the market, so LCI data is not based on a full year of production. Results shall be used with care. Besides Production data, data quality is very good / good.

Electricity grid

For the manufacturing in Dongguan, China, the corresponding electricity grid mix as stated on the invoice is used: Photovoltaic (100%).

ENVIRONMENTAL IMPACT OF THE ELECTRICITY USED IN CN

CO ₂ eq. [kg/kWh]	0.018
------------------------------	-------

Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				RESOURCE RECOVERY STAGE
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	x	x	x	x	x	ND	ND	ND	ND	ND	x	ND	x	x	x	x	x
Geography	GLO	GLO	CN, BEL	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO
Share of primary data	11.88%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	-5% / +86%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Acronyms	GLO = Global, CN = China, BEL = Belgium																

Primary data used

The share of primary data is calculated based on GWP-GHG results. It is a simplified indicator for data quality that supports the use of more primary data, to increase the representativeness of and comparability between EPDs. Note that the indicator does not capture all relevant aspects of data quality and is not comparable across product categories.

Calculation of primary data used for module A1-A3:

PROCESS	SOURCE TYPE	SOURCE	REFERENCE YEAR	DATA CATEGORY	SHARE OF PRIMARY DATA OF GWP-GHG RESULTS FOR A1-A3
Transport of raw materials to manufacturing site	Collected Data	EPD Owner, Suppliers	2024-2025	Primary data	11.07%
Electricity used in manufacturing	Collected Data	EPD Owner	2024-2025	Primary data	0.81%
Total share of primary data of GWP-GHG results for A1-A3					11.88%

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks. Usage of results from A1-A3 without considering the results of module C is not encouraged.

**MANDATORY IMPACT CATEGORY
INDICATORS ACCORDING TO
EN 15804+A2 (BASED ON EF 3.1)**

Indicator	Unit	Results per declared unit								
		A1 – A3	A4	A5	B6	C1	C2	C3	C4	D
GWP – fossil	kg CO ₂ eq.	4.04E+01	4.79E-01	1.27E-01	3.55E+02	0.00E+00	1.55E-02	5.26E+00	7.91E-03	-1.66E+01
GWP – biogenic	kg CO ₂ eq.	-3.22E+00	0.00E+00	3.22E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GWP – luluc	kg CO ₂ eq.	5.84E-02	1.22E-02	2.24E-04	1.16E+00	0.00E+00	1.65E-04	1.68E-03	1.96E-05	-3.16E-02
GWP – total	kg CO₂ eq.	3.73E+01	4.91E-01	3.35E+00	3.56E+02	0.00E+00	1.57E-02	5.26E+00	7.93E-03	-1.66E+01
ODP	kg CFC 11 eq.	8.72E-09	1.32E-13	2.20E-13	7.19E-09	0.00E+00	1.89E-15	1.01E-11	2.21E-14	-6.06E-10
AP	mol H+ eq.	1.97E-01	7.33E-04	1.83E-04	8.50E-01	0.00E+00	2.51E-05	2.64E-03	5.34E-05	-1.85E-01
EP – freshwater	kg P eq.	4.42E-04	8.97E-07	1.93E-06	6.75E-04	0.00E+00	4.33E-08	1.33E-06	1.25E-08	-8.65E-06
EP – marine	kg N eq.	4.00E-02	2.96E-04	7.89E-05	1.99E-01	0.00E+00	1.02E-05	9.07E-04	1.34E-05	-1.41E-02
EP – terrestrial	mol N eq.	4.28E-01	3.30E-03	7.37E-04	2.22E+00	0.00E+00	1.09E-04	1.17E-02	1.46E-04	-1.53E-01
POCP	kg NMVOC eq.	1.17E-01	6.96E-04	2.37E-04	5.14E-01	0.00E+00	2.17E-05	2.34E-03	4.10E-05	-4.55E-02
ADP – minerals & metals*	kg Sb eq.	1.74E-03	6.33E-08	4.75E-09	6.64E-05	0.00E+00	1.06E-09	1.08E-07	6.89E-10	-5.35E-03
ADP – fossil*	MJ	4.88E+02	6.13E+00	6.56E-01	6.73E+03	0.00E+00	2.05E-01	1.04E+01	1.17E-01	-2.05E+02
WDP*	m ³	8.26E+00	1.80E-03	3.96E-02	9.19E+01	0.00E+00	6.43E-05	7.59E-01	9.01E-04	-4.03E+00

Acronyms

GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential. deprivation-weighted water consumption

*Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

**MANDATORY AND
VOLUNTARY IMPACT
CATEGORY INDICATORS**

Indicator	Unit	Results per declared unit								
		A1 – A3	A4	A5	B6	C1	C2	C3	C4	D
GWP – GHG1	kg CO ₂ eq.	4.05E+01	4.91E-01	1.27E-01	3.56E+02	0.00E+00	1.57E-02	5.26E+00	7.93E-03	-1.66E+01
PM	disease inc.	2.50E-06	7.31E-09	1.50E-09	8.04E-06	0.00E+00	2.40E-10	2.82E-08	6.38E-10	-1.58E-06
IRP – HE**	kg U235-eq	7.87E-01	8.76E-04	4.41E-03	1.61E+02	0.00E+00	3.73E-05	2.06E-01	1.82E-04	-7.68E-01
ETP – fw*	CTUe	2.24E+02	6.79E+00	5.29E-01	1.12E+03	0.00E+00	2.65E-01	2.55E+00	7.74E-02	-9.11E+01
HTP – c*	CTUh	2.35E-08	9.72E-11	1.21E-11	1.09E-07	0.00E+00	3.57E-12	2.66E-10	5.54E-12	-1.06E-08
HTP – nc*	CTUh	4.10E-07	3.76E-09	7.00E-10	2.25E-06	0.00E+00	2.01E-10	1.23E-08	5.29E-10	-4.58E-07
SQP	dimensionless	1.49E+02	3.21E+00	1.94E-01	2.56E+03	0.00E+00	9.08E-02	3.99E+00	2.17E-02	2.61E+02
Acronyms	PM = particulate matter emissions; IRP-HE = ionizing radiation potential-human exposure; ETP-fw = ecotoxicity (freshwater); HTP-c = human toxicity potential, cancer effects; HTP-nc = human toxicity potential, non-cancer effects; SQP = land use related impacts.									

¹ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product.
This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Additional LCA results

Results for additional scenarios for End-of-Life modules.

Mandatory impact category indicators according to EN 15804 + A2 (based on EF 3.1)

Indicator	Unit	100% RECYCLING			100% INCINERATION			100% LANDFILL		
		C2	C3	C4	C2	C3	C4	C2	C3	C4
GWP – fossil	kg CO ₂ eq.	1.38E-02	2.99E+01	0.00E+00	2.25E-02	1.67E+00	0.00E+00	1.38E-02	0.00E+00	3.53E-02
GWP – biogenic	kg CO ₂ eq.	7.20E-05	1.10E-01	0.00E+00	1.17E-04	-7.52E-04	0.00E+00	7.20E-05	0.00E+00	-2.39E-04
GWP – luluc	kg CO ₂ eq.	1.48E-04	1.13E-02	0.00E+00	2.40E-04	1.38E-04	0.00E+00	1.48E-04	0.00E+00	9.85E-05
GWP – total	kg CO ₂ eq.	1.41E-02	3.00E+01	0.00E+00	2.28E-02	1.67E+00	0.00E+00	1.41E-02	0.00E+00	3.52E-02
GWP-GHG	kg CFC 11 eq.	1.40E-02	2.99E+01	0.00E+00	2.27E-02	1.67E+00	0.00E+00	1.40E-02	0.00E+00	3.54E-02
ODP	kg CFC 11 eq.	1.69E-15	6.74E-11	0.00E+00	2.75E-15	-1.79E-12	0.00E+00	1.69E-15	0.00E+00	1.10E-13
AP	mol H+ eq.	2.24E-05	1.69E-02	0.00E+00	3.64E-05	4.57E-04	0.00E+00	2.24E-05	0.00E+00	2.24E-04
EP – freshwater	kg P eq.	3.87E-08	9.27E-06	0.00E+00	6.29E-08	3.39E-09	0.00E+00	3.87E-08	0.00E+00	5.46E-06
EP – marine	kg N eq.	9.14E-06	5.91E-03	0.00E+00	1.49E-05	1.67E-04	0.00E+00	9.14E-06	0.00E+00	5.37E-05
EP – terrestrial	mol N eq.	9.74E-05	7.45E-02	0.00E+00	1.58E-04	2.33E-03	0.00E+00	9.74E-05	0.00E+00	5.87E-04
POCP	kg NMVOC eq.	1.94E-05	1.52E-02	0.00E+00	3.15E-05	4.46E-04	0.00E+00	1.94E-05	0.00E+00	1.67E-04
ADP – minerals & metals*	kg Sb eq.	9.50E-10	7.05E-07	0.00E+00	1.54E-09	-1.18E-08	0.00E+00	9.50E-10	0.00E+00	2.65E-09
ADP – fossil*	MJ	1.83E-01	6.88E+01	0.00E+00	2.97E-01	2.03E+00	0.00E+00	1.83E-01	0.00E+00	5.59E-01
WDP*	m ³	5.74E-05	4.60E+00	0.00E+00	9.33E-05	2.84E-01	0.00E+00	5.74E-05	0.00E+00	4.15E-03

Acronyms

GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential. Accumulated Exceedance; EP-freshwater = Eutrophication potential. fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential. fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential. Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Scaling factors for other variants

The different variants for Linier Suspended W181 luminaires are very similar but show some differences in their construction or dimensions. Those differences have been accounted for in the LCA. The results of the environmental performance indicators above can be scaled to the corresponding variants with the following conversion factors. The scaling factors were determined using the GWP-GHG indicator and are only valid for this indicator.

VARIANT	LIGHT CONTROL	A1 – A3	A4	A5	B6	C1-C4	D
W181S1 LINIER	DALI Push dim	1	1	1	1	1	1
W181S2 LINIER	DALI Push dim	1.86	2.29	1.87	1.94	1.48	1.54
W181S1 LINIER	Rotary dim	0.95	1.05	1.20	1	0.92	1.12

Results for 1000 lumens during a reference life of 35000 hours (As per reference of PEP-ECO Passport PSR-0014-ed2.0-EN-2023 07 13).

A conversion factor can be used for converting the results to 1000 lumens during a reference life of 35000 hours.

VARIANT	LIGHT CONTROL	CCT	A1-A3	A4	A5	B6	C1-C4	D
LINIER W181S1	DALI Push dim	3000K	0.49	0.49	0.49	0.41	0.49	0.49
LINIER W181S1	DALI Push dim	4000K	0.47	0.47	0.47	0.40	0.47	0.47
LINIER W181S2	DALI Push dim	3000K	0.24	0.24	0.21	0.24	0.24	0.24
LINIER W181S2	DALI Push dim	4000K	0.24	0.24	0.20	0.24	0.24	0.24
LINIER W181S1	Rotary dim	2700K	0.49	0.49	0.49	0.41	0.49	0.49
LINIER W181S1	Rotary dim	3000K	0.49	0.49	0.49	0.41	0.49	0.49

Information related to the sectorial EPD

This EPD is not sectorial.

Version History

This is the first version of the EPD.

ADPE – Abiotic depletion potential non-fossil resources	MFR – Materials for recycling
ADPF – Abiotic depletion potential fossil resources	NHWD – Non-hazardous waste disposed
AP – Acidification potential, accumulated exceedance	NRSF – Use of non-renewable secondary fuels
AUT – Austria	ODP – Depletion potential of the stratospheric ozone layer
CB – Certification Body	PCR – Product Category Rules
CRU – Components for re-use	PENRE – Use of non renewable primary energy as energy carrier
d/i – direct / indirect	PENRM – Use of non renewable primary energy resources used as raw materials
DALI – Digital Addressable Lighting Interface	PENRT – Total use of non renewable primary energy resource
EEE – Exported electrical energy	PERE – Use of renewable primary energy as energy carrier
EET – Exported thermal energy	PERM – Use of renewable primary energy resources used as raw materials
EPD – Environmental Product Declaration	PERT – Total use of renewable primary energy
EP-freshwater – Eutrophication potential freshwater	PM – Particulate matter emissions
EP-marine – Eutrophication potential marine	PMMA – Polymethylmetacrylate
EP-terrestrial – Eutrophication potential terrestrial	POCP – Photochemical ozone creation potential
ETP-fw – Eco toxicity freshwater	PSR – Product Specific Rules
FW – Net use of fresh water	RE – Renewable Energy
GLO – Global	RSF – Use of renewable secondary fuels
GWP-biogenic – Global warming potential biogenic	RWD – Radioactive waste disposed
GWP-fossil – Global warming potential fossil fuels	SLO – Slovenia
GWP-GHG – Global warming potential	SM – Use of secondary material
GWP-luluc – Global warming potential land use and land use change	SQP – Land use related impacts/Soil quality
GWP-total – Global warming potential total	UN CPC – United Nations Central Product Classification
HTTP-c – Human toxicity, cancer effect	WDP – Water (user) deprivation potential
HTTP-nc – Human toxicity, non-cancer effects	
HWD – Hazardous waste disposed	
IRP – Ionizing radiation, human health	
LCA – Life Cycle Assessment	
MER – Materials for energy recovery	

EN 15804:2012+A2:2019 /AC:2021 Sustainability of construction works. Environmental product declarations. Core rules for the product category of construction products.

EN 15193-1:2017+A1:2021 Energy performance of building – Energy requirements for lighting

European court of auditors. EU actions and existing challenges on electronic waste. Review No. 4. 2021

General Programme Instructions of the International EPD. System. Version 5.01.

ISO 14020:2000 – Environmental labels and declarations – General principles

ISO 14025:2006 - Environmental labels and declarations - Type III environmental declarations - Principles and procedures

ISO 14040:2021 Environmental management — Life cycle assessment — Principles and framework

ISO 14044:2021 Environmental management — Life cycle assessment — Requirements and guidelines

LCA Background Report. LINIER. Wastberg+. 2026-02-23

LCA for Experts 10.9.3.14. (Sphera)

PCR-ed4-EN-2021 09 062021. P.E.P. Association. Product Category Rules for Electrical Electronic and HVAC-R Products

Product category rules (PCR) 2019:14 Construction products version 2.0.1. 2025-06-05. The EPD International. 2025

PSR-0014-ed2.0-EN-2023 07 13. PSR SPECIFIC RULES FOR LUMINAIRES. According to PSRmodele-ed2-EN-2021 11 18.